


CUSTOMER WILL PROVIDE BRANCH CIRCUIT PROTECTION (F1)
SEE THE APPLICATION INSTRUCTION SHEET - COMPONENT SELECTION TABLES
FOR MAX. FUSE SIZE, CLASS, AND APPLICABLE SHORT CIRCUIT RATING
(USE 75°C COPPER WIRE ONLY)

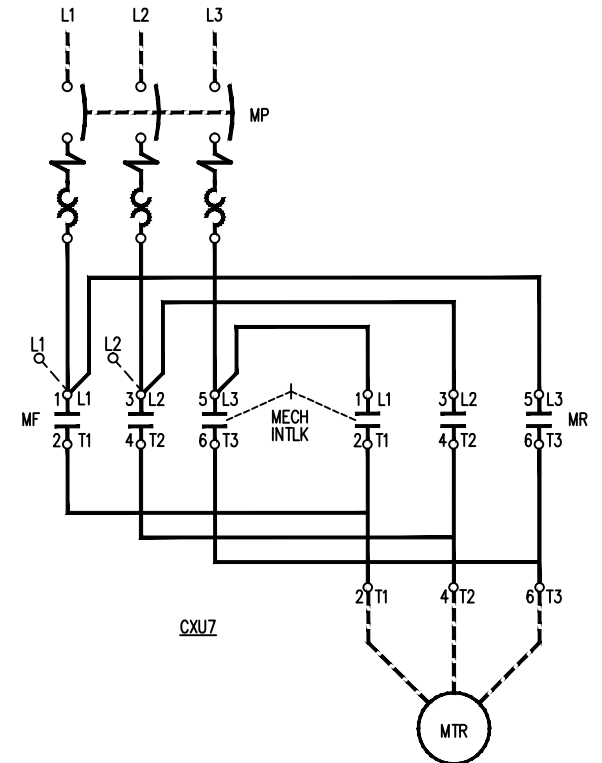

- NOTES:
1. MI: MECHANICAL INTERLOCK
 2. MP: KT7 "TYPE E" MOTOR CONTROLLER
 3. DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE

-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
REV	CHANGE	DATE	BY

NOTICE
THIS DRAWING IS THE CONFIDENTIAL PROPERTY OF SPRECHER+SCHUH, INC. and, as such, is subject to recall at any time. The drawing may not be reproduced, used or disclosed for any purpose except as authorized by SPRECHER+SCHUH, INC.

DRAWN BY:
WEH
CHECKED BY:
MLF
APPROVED BY:
--
DATE
09-24-2012

KWIKSTARTERS II
FULL VOLTAGE REVERSING
CXU7-9...23(E)-__-P*

sprecher+schuh HOUSTON, TX
DWG. NO.
CXU7 WS-114-52