







**PRODUCT CROSS OVER REFERENCE:  
Disconnect Switch Handles and Shafts -  
Series L10 to Series L11**











**UL98 - Disconnects Non-Fused**



Pole	AMP	L10 Catalog Number		L11 Catalog Number	
3	100		L10-NN100P3		L11-NU100-1753
4	100		NEW		L11-NU100-1754
3	200		L10-NN200P3		L11-NU200-1753
4	200		NEW		L11-NU200-1754
3	400		L10-NN400P3		L11-NU400-1753
4	400		NEW		L11-NU400-1754
3	600		NEW		L11-NU600-1753
4	600		NEW		L11-NU600-1754
3	800		NEW		L11-NU800-1753
4	800		NEW		L11-NU800-1754
3	1200		NEW		L11-NU1200-1753
4	1200		NEW		L11-NU1200-1754

**UL98 Disconnects - Fused**


Frame Size	AMP	L10 Catalog Number		L11 Catalog Number	
F5	100		L10- NJ100P3		L11-J100-1753
F6	200		L10-NJ200P3		L11-J200-1753
F7	400		L10-NJ400P3		L11-J400-1753
F8	600		NEW		L11-J600-1753
F9	800		NEW		L11-L800-1753

**L10 Handles to L11 Handles for L11-30/60 Disconnects**


Description	L10 Catalog Number		L11 Catalog Number		
<b>Standard Lever Handle with Defeater</b>		<b>L10-HS1</b> Type 1 – IP66		 <b>L11-PB</b> Type 3R, 3, 12, 4, 4X – IP66	+ <b>L11-S1</b> 30.48cm (12 inches) shaft length <b>OR</b> <b>L11-S2</b> 53.34cm (21 inches) shaft length
		<b>L10-HS4</b> Type 3R, 3, 12, 4, 4X – IP66			
		<b>L10-HS1-N2</b> Type 1 – IP66			
		<b>L10-HS4-N2</b> Type 3R, 3, 12, 4, 4X – IP66			
<b>Standard Lever Handle with Defeater</b>		<b>L10-HS1E</b> Type 1 – IP66		 <b>L11-PY</b> Type 3R, 3, 12, 4, 4X – IP66	+ <b>L11-S1</b> 30.48cm (12 inches) shaft length <b>OR</b> <b>L11-S2</b> 53.34cm (21 inches) shaft length
		<b>L10-HS4E</b> Type 3R, 3, 12, 4, 4X – IP66			
		<b>L10-HS1E-N2</b> Type 1 – IP66			
		<b>L10-HS4E-N2</b> Type 3R, 3, 12, 4, 4X – IP66			
<b>Standard Lever, Test</b>		<b>L10-HST4</b> Type 3R, 3, 12, 4, 4X – IP66		<b>L11-PBT</b> Type 3R, 3, 12, 4, 4X – IP66	+ <b>L11-S1</b> 30.48cm (12 inches) shaft length <b>OR</b> <b>L11-S2</b> 53.34cm (21 inches) shaft length
		<b>L10-HST4E</b> Type 3R, 3, 12, 4, 4X – IP66			
<b>Standard Lever, Test</b>		<b>L10-HST4E</b> Type 3R, 3, 12, 4, 4X – IP66		<b>L11-PYT</b> Type 3R, 3, 12, 4, 4X – IP66	+ <b>L11-S1</b> 30.48cm (12 inches) shaft length <b>OR</b> <b>L11-S2</b> 53.34cm (21 inches) shaft length
		<b>L10-HST4</b> Type 3R, 3, 12, 4, 4X – IP66			

Description	L10 Catalog Number		L11 Catalog Number	
<b>NFPA 79 Handle</b> 30.48 cm (12 inches) Shaft Kit		<b>L10-NHR1</b>		<b>L11-N1</b>
<b>NFPA 79 Handle</b> 53.34 cm (21 inches) Shaft Kit		<b>L10NHR2</b>		<b>L11-N2</b>







L11-P



L10-HS



mm  
(in.)

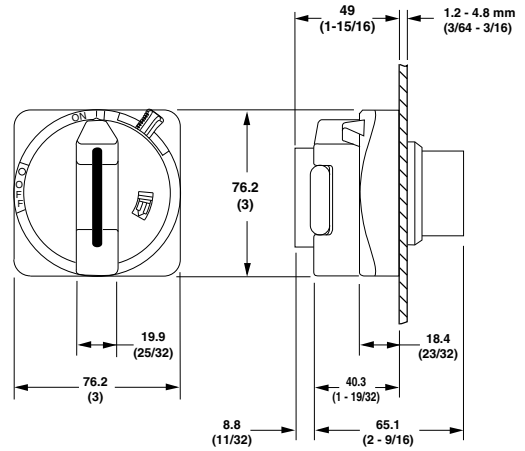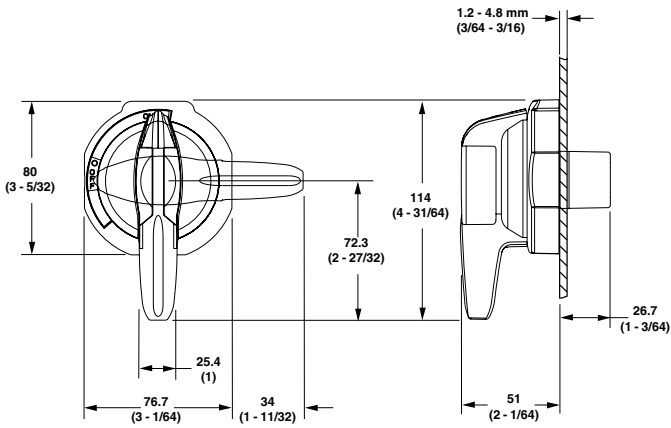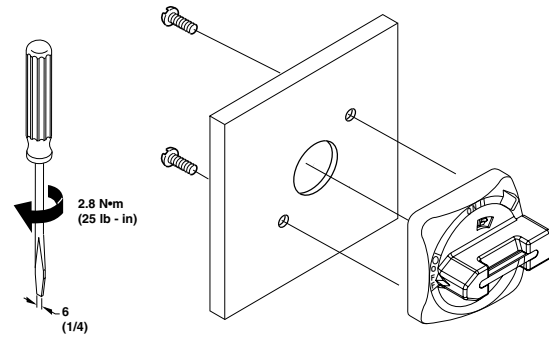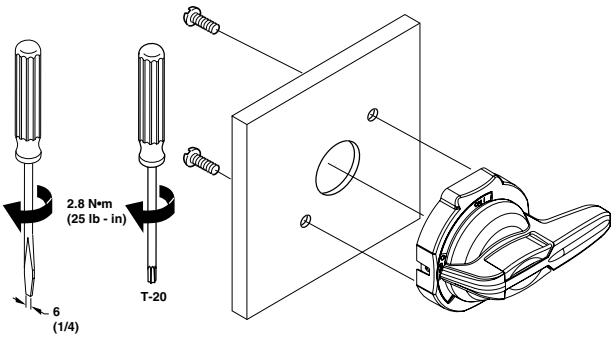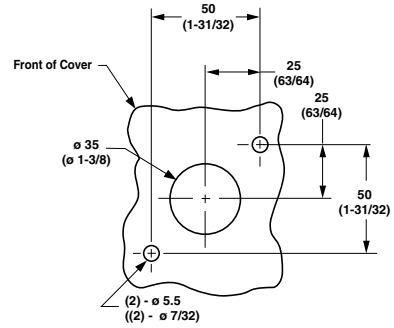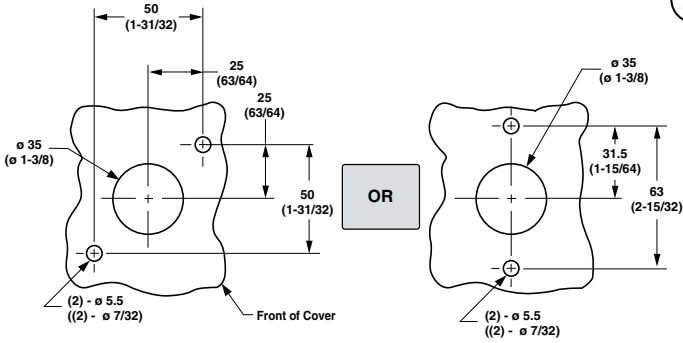

**Key Features**



**One-hand Operation – single motion allows user to open the door**




**Padlocking – modified design simplifies padlocking even while using personal protective equipment**



**Defeater – accessible location allows quick release of the internal shaft from the handle**


**Installation**

- Backward compatible – mounts using existing hole pattern
- Additional vertical hole pattern – eases layout
- Larger receiver compensates for misalignment

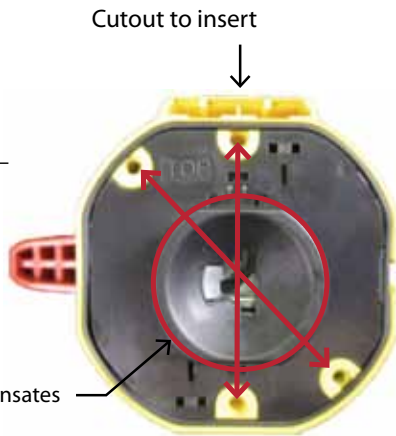

**Inside the handle**

- The mechanism is cast metal for greater durability
- The seal is integral to the handle and no additional loose O-rings
- UL type 3R, 3, 12, 4, 4X environmental ratings

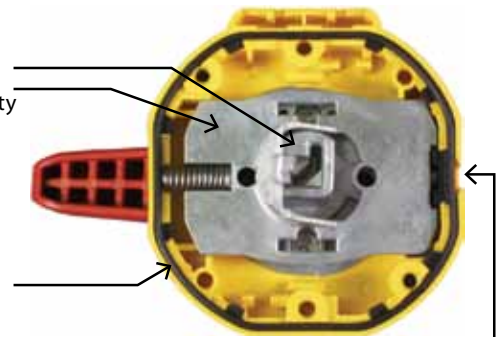

Depress to engage defeater



**Sprecher + Schuh US Division Headquarters**  
15910 International Plaza Drive  
Houston, TX 77032

Customer Service: (877) 721-5913  
Fax: (800) 739-7370

**Sprecher + Schuh Canadian Deivision**  
10 Spy Court  
Markham, ON L3R 5H6

Customer Service: (905) 475-6543  
Fax: (905) 475-0027

[www.sprecherschuh.com](http://www.sprecherschuh.com)

## Disconnect Switch Handles and Shaft Series L10 to Series L11 *Cross Reference*

CROSS-L11DSWITCH-213 05/2013

Sprecher + Schuh has provided reliable control and protection solutions for its customers since 1903.

Today, Sprecher + Schuh offers a wide range of low-voltage industrial control products, including contactors, a variety of relays, starters, push buttons, switches, terminals and controllers, to name a few. All of our products are crafted with precision and tested rigorously for performance — far exceeding industry standards. Moving forward, we continue along the path of constantly seeking innovative ways to provide solutions for our customers. It is by this philosophy that Sprecher + Schuh has come to be the industrial control manufacturer of choice for many customers around the globe seeking quality, reliability, and a name they can trust.