

Series L2 Rotary Cam Switches

Attractive design,
reliable operation
and high quality for
any application up
to 25 Amps

Sprecher + Schuh's comprehensive line of L2 rotary cam switches are available for all control and load applications up to 25 amps. The line is modular and has many convenience and safety features. A well thought out ordering system provides many standard and nonstandard configurations, that are many times available off the shelf.

Any switch configuration...

Two frame sizes provide control and load switching up to 25 amps. Both frame sizes are available in panel mount and base mount for total flexibility. A wide range of switching configurations are offered, as listed below.

...For any application

L2 control and load switches are UL listed, CSA approved and comply with the most important international standards for use as:

- **Control switches** - for process control, making and breaking circuits and as instrument selector switches.
- **Motor switches** - as ON/OFF and reversing switches.
- **Multi-position load switches** - for the step control of loads such as heaters and furnaces.
- **Motor load disconnect switches** - for safely isolating circuits during repair and maintenance.
- **Emergency OFF switches** - for isolating circuits in case of danger or emergency situations. Can be equipped for locking in the OFF position.



Safety and quality

The L2's sturdy design incorporates a positive switching action with a clearly designed switching point. Switch bodies are touch-safe (IP20) and manufactured from self-extinguishing materials corresponding to Class UL 94 V0. All control knobs and shafts are spray proof and dust proof to IP65.

Modular and flexible

The same switch handle assemblies and shaft extension systems are used for both our L2 control switches and L7 disconnect switches. This reduces inventory, simplifies stocking and allows you to put together the ideal switch for your application quickly and easily.

Simple assembly and fast installation

Shaft extensions and door interlocks snap-on quickly without tools, saving time during assembly. Captive terminals are shipped open and are totally accessible regardless of whether the switch is base mounted or panel mounted. Screwdriver guides and clear terminal markings reduce wiring mistakes and speed installation.

In addition, most switch handle assemblies are available with either screw fixing or the central nut mounting system for total flexibility.



K1

L2 Rotary Cam Switches

TIP!




To learn the basic differences between control, load and fusible disconnect switches and how to apply them, see our white paper Tech-LMSD in the online library.

How to order L2 control and load switches

A complete L2 switch is ordered with just two catalog numbers. The first number specifies the switch body and the second specifies the switch handle assembly. All L2 switch bodies come standard with a shaft and mounting screws for the switch handle assembly. Accessories such as shaft extensions and enclosures are ordered separately.

First determine the switch body you need from pages K1:4 through K1:7. Then turn to page K1:8 to choose a switch handle assembly. If necessary, turn to page K1:10 and K1:11 to determine the type and length of shaft extension you require.

Switch Handle Assemblies - page K1:8

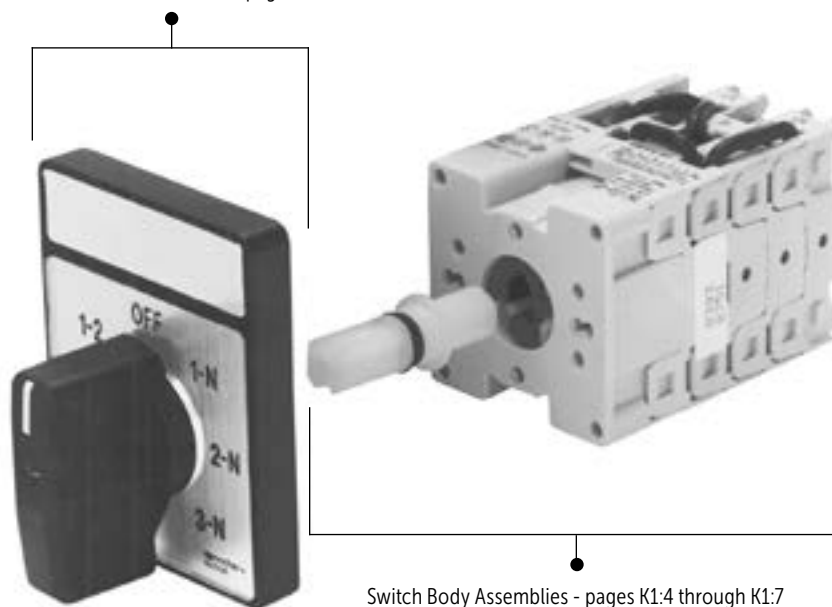

Switch Body Assemblies - pages K1:4 through K1:7

A comprehensive family of switches


The L2 line is part of an entire family of control and load switches available from Sprecher + Schuh.

For specialized switching requirements or large ampere applications up to 40A (@600V), our R-Line Rotary Cam Switches offer a broad selection and rugged quality. See the next chapter in this section entitled “R-Line Rotary Cam Switches” (K2:1) for ordering information.

Our modular L7 disconnect switches are rated to 100 amps for motor, loads and disconnect switching. They share many of the same components with the L2 line. A complete description and ordering information can be found in Section L of this catalog.





Rounding out our selection of “man-machine interfaces,” Sprecher + Schuh also offers a broad selection of 22mm pilot devices. See “Section H” in this catalog for ordering information.


K1
L2 Rotary Cam Switches

Switch Body Description			Switch Body Catalog Number				Switch Handle Code
Function	Switch Angle	Poles/ Switch Wafers	Panel Mount				
			12 Amp	16 Amp	20 Amp	25 Amp	
ON - OFF							
	90°	1 / 1	LE2-12-1751	LE2-16-1751	LE2-20-1751	LE2-25-1751	175 175I
		2 / 1	LE2-12-1752	LE2-16-1752	LE2-20-1752	LE2-25-1752	
		3 / 2	LE2-12-1753	LE2-16-1753	LE2-20-1753	LE2-25-1753	
		4 / 2	LE2-12-1754	LE2-16-1754	LE2-20-1754	LE2-25-1754	
		5 / 3	LE2-12-1755	LE2-16-1755	LE2-20-1755	LE2-25-1755	
		6 / 3	LE2-12-1756	LE2-16-1756	LE2-20-1756	LE2-25-1756	
	90°	1 / 1	LE2-12-1781	LE2-16-1781	LE2-20-1781	LE2-25-1781	178 178I
		2 / 1	LE2-12-1782	LE2-16-1782	LE2-20-1782	LE2-25-1782	
		3 / 2	LE2-12-1783	LE2-16-1783	LE2-20-1783	LE2-25-1783	
		4 / 2	LE2-12-1784	LE2-16-1784	LE2-20-1784	LE2-25-1784	
Double Throw							
	45°	1 / 1	LE2-12-2251	LE2-16-2251	LE2-20-2251	LE2-25-2251	225
		2 / 2	LE2-12-2252	LE2-16-2252	LE2-20-2252	LE2-25-2252	
		3 / 3	LE2-12-2253	LE2-16-2253	LE2-20-2253	LE2-25-2253	
		4 / 4	LE2-12-2254	LE2-16-2254	LE2-20-2254	LE2-25-2254	
		5 / 5	LE2-12-2255	LE2-16-2255	LE2-20-2255	LE2-25-2255	
	60°	1 / 1	LE2-12-2501	LE2-16-2501	LE2-20-2501	LE2-25-2501	250
		2 / 2	LE2-12-2502	LE2-16-2502	LE2-20-2502	LE2-25-2502	
		3 / 3	LE2-12-2503	LE2-16-2503	LE2-20-2503	LE2-25-2503	
		4 / 4	LE2-12-2504	LE2-16-2504	LE2-20-2504	LE2-25-2504	
		5 / 5	LE2-12-2505	LE2-16-2505	LE2-20-2505	LE2-25-2505	
	45°	1 / 1	LE2-12-3251	LE2-16-3251	LE2-20-3251	LE2-25-3251	325 325R
		2 / 2	LE2-12-3252	LE2-16-3252	LE2-20-3252	LE2-25-3252	
		3 / 3	LE2-12-3253	LE2-16-3253	LE2-20-3253	LE2-25-3253	
		4 / 4	LE2-12-3254	LE2-16-3254	LE2-20-3254	LE2-25-3254	
	60°	1 / 1	LE2-12-3501	LE2-16-3501	LE2-20-3501	LE2-25-3501	350
		2 / 2	LE2-12-3502	LE2-16-3502	LE2-20-3502	LE2-25-3502	
		3 / 3	LE2-12-3503	LE2-16-3503	LE2-20-3503	LE2-25-3503	
		4 / 4	LE2-12-3504	LE2-16-3504	LE2-20-3504	LE2-25-3504	
	90°	1 / 1	LE2-12-3751	LE2-16-3751	LE2-20-3751	LE2-25-3751	375
		2 / 2	LE2-12-3752	LE2-16-3752	LE2-20-3752	LE2-25-3752	
		3 / 3	LE2-12-3753	LE2-16-3753	LE2-20-3753	LE2-25-3753	
		4 / 4	LE2-12-3754	LE2-16-3754	LE2-20-3754	LE2-25-3754	
	45°	1 / 1	LE2-12-3261	LE2-16-3261	LE2-20-3261	LE2-25-3261	325
		2 / 2	LE2-12-3262	LE2-16-3262	LE2-20-3262	LE2-25-3262	
		3 / 3	LE2-12-3263	LE2-16-3263	LE2-20-3263	LE2-25-3263	





Ordering Instructions

- Specify Switch Body catalog# from top of column.
- Replace (▲) with Circuit Diagram Number (refer to pages K1:13-K1:16 for diagrams).
- Select Switch Handle Assembly from pages K1:8 using Switch Handle Code above (switch handles sold separately).
- Example: LE2-16-1753 (Switch Body)
LFS2-A-4-175 (Switch Handle Assembly)

Switch Body Description			Switch Body Catalog Number				Switch Handle Code
Function	Switch Angle	Poles/ Switch Wafers	Panel Mount				
			12 Amp	16 Amp	20 Amp	25 Amp	
3 Position							
	60°	1 / 2 2 / 3 3 / 5	LE2-12-4501 LE2-12-4502 LE2-12-4503	LE2-16-4501 LE2-16-4502 LE2-16-4503	LE2-20-4501 LE2-20-4502 LE2-20-4503	LE2-25-4501 LE2-25-4502 LE2-25-4503	450
3 Position (with OFF)							
	45°	1 / 1 2 / 2 3 / 3	LE2-12-5251 LE2-12-5252 LE2-12-5253	LE2-16-5253	LE2-20-5252	LE2-25-5252 LE2-25-5253	525
4 Position							
	60°	1 / 2 2 / 4 3 / 6	LE2-12-4511 LE2-12-4512 LE2-12-4513	LE2-16-4511 LE2-16-4512 LE2-16-4513		LE2-25-4512 LE2-25-4513	451
4 Position (with OFF)							
	45°	1 / 2 2 / 3 3 / 5	LE2-12-5261 LE2-12-5262 LE2-12-5263	LE2-16-5261 LE2-16-5262 LE2-16-5263	LE2-20-5261 LE2-20-5262 LE2-20-5263	LE2-25-5261 LE2-25-5262 LE2-25-5263	526
5 Position (with OFF)							
	45°	1 / 2 2 / 4 3 / 6	LE2-12-5271 LE2-12-5272 LE2-12-5273	LE2-16-5271 LE2-16-5272 LE2-16-5273	LE2-20-5271 LE2-20-5272 LE2-20-5273	LE2-25-5271 LE2-25-5272 LE2-25-5273	527
6 Position							
	60°	1 / 3	LE2-12-4531	LE2-16-4531	LE2-20-4531	LE2-25-4531	453
6 Position (with OFF)							
	60°	1 / 3 2 / 5 3 / 8	LE2-12-5531 LE2-12-5532 LE2-12-5533	LE2-16-5531 LE2-16-5532 LE2-16-5533	LE2-20-5531 LE2-20-5532 LE2-20-5533	LE2-25-5531 LE2-25-5532 LE2-25-5533	553











Ordering Instructions

- Specify Switch Body catalog# from top of column.
- Replace (▲) with Circuit Diagram Number (refer to pages K1:13-K1:16 for diagrams).
- Select Switch Handle Assembly from pages K1:8 using Switch Handle Code above (switch handles sold separately).
- Example: LE2-16-1753 (Switch Body)
LFS2-A-4-175 (Switch Handle Assembly)

Switch Body Description			Switch Body Catalog Number				Switch Handle Code
Function	Switch Angle	Poles/ Switch Wafers	Panel Mount				
			12 Amp	16 Amp	20 Amp	25 Amp	
START - STOP							
	45°	1 / 1	LE2-12-9251	LE2-16-9251	LE2-20-9251	LE2-25-9251	925
REVERSING							
	45 °	3 / 3	LE2-12-7303	LE2-16-7303	LE2-20-7303	LE2-25-7303	325
Two Speed Single Winding (Dahlander)							
	45°	3 / 4	LE2-12-7293	LE2-16-7293	LE2-20-7293	LE2-25-7293	325
Voltmeter							
	45	NA / 3	LE2-12-8251	LE2-16-8251	LE2-20-8251	LE2-25-8251	825 825A
	45°	NA / 2	LE2-12-8271	LE2-16-8271	LE2-20-8271	LE2-25-8271	827 827A
Ammeter							
 3 Current Transformers	90°	1 / 3	LE2-12-8751	LE2-16-8751	LE2-20-8751	LE2-25-8751	875
		2 / 5	LE2-12-8752	LE2-16-8752	LE2-20-8752	LE2-25-8752	

Ordering Instructions

- Specify Switch Body catalog# from top of column.
- Replace (▲) with Circuit Diagram Number (refer to pages K1:13-K1:16 for diagrams).
- Select Switch Handle Assembly from pages K1:8 using Switch Handle Code above (switch handles sold separately).
- Example: LE2-16-1753 (Switch Body)
LFS2-A-4-175 (Switch Handle Assembly)

Switch Body Description			Switch Body Catalog Number				Switch Handle Code
Function	Switch Angle	Poles/ Switch Wafers	Base Mount				
			12 Amp	16 Amp	20 Amp	25 Amp	
ON - OFF							
	90°	1 / 1 2 / 1 3 / 2 4 / 2 5 / 3 6 / 3	LA2-12-1751 LA2-12-1752 LA2-12-1753 LA2-12-1754 LA2-12-1755 LA2-12-1756	LA2-16-1751 LA2-16-1752 LA2-16-1753 LA2-16-1754 LA2-16-1755 LA2-16-1756	LA2-20-1751 LA2-20-1752 LA2-20-1753 LA2-20-1754 LA2-20-1755 LA2-20-1756	LA2-25-1751 LA2-25-1752 LA2-25-1753 LA2-25-1754 LA2-25-1755 LA2-25-1756	175 175I
	90°	1 / 1 2 / 1 3 / 2 4 / 2	LA2-12-1781 LA2-12-1782 LA2-12-1783 LA2-12-1784	LA2-16-1781 LA2-16-1782 LA2-16-1783 LA2-16-1784	LA2-20-1781 LA2-20-1782 LA2-20-1783 LA2-20-1784	LA2-25-1781 LA2-25-1782 LA2-25-1783 LA2-25-1784	178 178I
Double Throw							
	45°	1 / 1 2 / 2	LA2-12-2251 LA2-12-2252	LA2-16-2251 LA2-16-2252	LA2-20-2251 LA2-20-2252	LA2-25-2251 LA2-25-2252	225
	45°	1 / 1 2 / 2 3 / 3 4 / 4	LA2-12-3251 LA2-12-3252 LA2-12-3253 LA2-12-3254	LA2-16-3251 LA2-16-3252 LA2-16-3253 LA2-16-3254	LA2-20-3251 LA2-20-3252 LA2-20-3253 LA2-20-3254		325 325R
4 Position (with OFF)							
	45°	1 / 2	LA2-12-5261	LA2-16-5261	LA2-20-5261	LA2-25-5261	526
5 Position (with OFF)							
	45°	1 / 2	LA2-12-5271	LA2-16-5271	LA2-20-5271	LA2-25-5271	527
START - STOP							
	45°	1 / 1	LA2-12-9251	LA2-16-9251	LA2-20-9251	LA2-25-9251	925
REVERSING							
	45 °	3 / 3	LA2-12-7303	LA2-16-7303	LA2-20-7303	LA2-25-7303	325
Voltmeter							
	45	NA / 3	LA2-12-8251	LA2-16-8251	LA2-20-8251	LA2-25-8251	825 825A
	45°	NA / 2	LA2-12-8271				827 827A
Ammeter							
	90°	1 / 3 2 / 5	LA2-12-8751	LA2-16-8751	LA2-20-8751	LA2-25-8751	875

Switch Handle Assemblies

Switch Handle Assembly	Mounting Method	Frame Size	Catalog Number
 Type A - Type 12 Silver Legend Plate - Black Knob	Screw ①	48 x 48	LFS2-A-4-*
		64 x 64	LFS2-A-6-*
	Central Nut ②	48 x 48	LFC2-A-4-*
 Type E - Type 12 Silver Legend Plate - Black Knob	Screw ①	48 x 48	LFS2-E-4-*
		64 x 64	LFS2-E-6-*
	Central Nut ②	48 x 48	LFC2-E-4-*
 Type I - Type 12 Yellow Legend Plate - Red Knob	Screw ①	48 x 48	LFS2-I-4-*
		64 x 64	LFS2-I-6-*
	Central Nut ②	48 x 48	LFC2-I-4-*
 Type L - Type 12 Yellow Legend Plate - Red Knob	Screw ①	48 x 48	LFS2-L-4-*
		64 x 64	LFS2-L-6-*
	Central Nut ②	48 x 48	LFC2-L-4-*

Switch Handle Assembly	Mounting Method	Frame Size	Catalog Number
 Type G - Type 12 Grey Frame - Black Handle	Screw ①	67 x 67	LFS2-G-6-175
	Central Nut ②	67 x 67	LFC2-G-6-175
 Type N - Type 12 Yellow Frame - Red Handle	Screw ①	67 x 67	LFS2-N-6-175
	Central Nut ②	67 x 67	LFC2-N-6-175
 Type B - Type 12 Grey Ring - Black Knob	Central Nut ②	NA	LFC2-B-001
 Type C - Type 12 Silver Legend Plate	Central Nut ②	48x48	LFC2-C-4-*

Ordering Instructions

- Specify Switch Body catalog# from top of column.
- Replace (*) with Switch Handle Code Number (refer to pages K1:9) for Legend Plate desired.
- Where applicable replace (◆) with Key Withdraw Code.
- Example: LFC2-C-◆-4-* = LFC2-CK-4-553

C =  D =  G =  H =  K = 

- ① Mounting screws included with Switch Body Assy.
- ② Central Nut mounting method cannot be used on LA style Switch Body Assemblies.
- ③ To order Switch Handle Assembly without legend plate, replace (*) with "001".
- ④ LFS(C)2-G(N)-6-175 handles are marked "I-ON" and "O-OFF".

Switch Handle Codes

Switch Handle Code	Standard Legend Markings ④	Frame Size ①	Switch Handle Assembly Type												
			Screw Mount						Central Nut						
			A	E	I	L	G	N	A	E	I	L	C	G	N
000		Standard	•	•	•	•			•	•	•	•	•		
		Larger	•	•	•	•						•			
175		Standard	•	•	•	•	•	•	•	•	•	•	•	•	•
		Larger	•	•	•	•					•			•	•
175I		Standard	•	•	•	•	•	•	•	•	•	•	•	•	•
		Larger	•	•	•	•					•			•	•
178		Standard	•	•	•	•			•	•	•	•	•		
		Larger	•	•	•	•					•				
178I		Standard	•	•	•	•			•	•	•	•	•		
		Larger	•	•	•	•					•				
225		Standard	•						•				•		
		Larger	•												
250		Standard	•						•				•		
		Larger	•												
325		Standard	•						•				•		
		Larger	•												
325R		Standard	•						•				•		
		Larger	•												
350 ②		Standard	•						•				•		
		Larger	•												
375		Standard	•						•				•		
		Larger	•												
450		Standard	•						•				•		
		Larger	•												

Switch Handle Code	Standard Legend Markings ❹	Frame Size ❶	Switch Handle Assembly Type												
			Screw Mount						Central Nut						
			A	E	I	L	G	N	A	E	I	L	C	G	N
451		Standard	●						●				●		
		Larger	●												
453		Standard	●						●				●		
		Larger	●												
525		Standard	●						●				●		
		Larger	●												
526		Standard	●						●				●		
		Larger	●												
527		Standard	●						●				●		
		Larger	●												
553		Standard	●						●				●		
		Larger	●												
825		Standard	●						●						
		Larger	●												
825A		Standard	●						●						
		Larger	●												
827		Standard	●						●						
		Larger	●												
827A		Standard	●						●						
		Larger	●												
875		Standard	●						●	●					
		Larger	●												
925		Standard	●						●						
		Larger	●												

① Frame Size descriptions:

Type: A, E, I & L C N & G
 Standard: 48x48 48x48 67X67
 Larger: 64x64

② Available with "MAN-O-AUTO" or "HAND-O-AUTO" legend marking.

③ LFS(C)2-G(N)-6-175 handles are marked "I-ON" and "O-OFF".

④ For legend plate markings not included here, see page K1:17 for Custom Name Plates.

NOTE: Types "N" and "G" are not available with custom markings. List Price adder applies.


Modular shaft extension system

Shaft Extension Modules are ideal for lengthening the shaft of an LA2 switch up to 144mm (≈5.5"). These rugged polycarbonate modules are 24mm (≈15/16") long and snap on "piggyback" to one another without the use of tools. Strong center shafts interlock as each module is snapped together. The standard 44mm End Shaft supplied with every LA2 switch connects the last Extension Module with the Switch Handle Assembly. End Shafts of 52 and 57mm are also available, making this modular system versatile, fast and economical. Shaft Extension Modules are supplied two per package.



Determining modular shaft extension components

- Determine Mounting Depth. This is the distance from the inside mounting surface of the enclosure to the outside surface of the enclosure cover. See diagram below for details ❶.

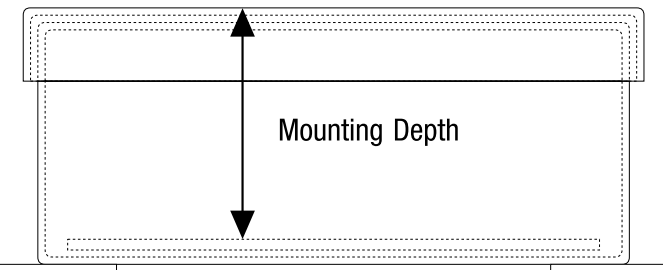

- If necessary convert Mounting Depth inches to millimeters (inches x 25.4 = millimeters).
- In the Modular Shaft Extension Table to the right, find the Mounting Depth in the column under the appropriate LA2 Switch Body.

NOTE: Table is based on an LA2 switch body with two wafers (3 or 4 pole). For a switch body with more or less wafers, add or subtract the following from overall Mounting Depth before referring to table:

LA2-12/16 Switch Body- ±10mm per wafer

LA2-20/25 Switch Body- ±12.5mm per wafer

- Order the End Shaft and number of Extension Modules required for that Mounting Depth.

Modular Shaft Extension Components (LA2 Base Mount)

Component	Catalog Number
44mm End Shaft ❷ (supplied with LA2 Switch Body Assembly)	LA2-G2830
52mm End Shaft	LA2-G3194
57mm End Shaft	LA2-G3195
Extension Module (two per pkg - priced per pkg)	LA2-G2853

Modular Shaft Extension Table

Number of Extension Modules	Required End Shaft	Mounting Depth (mm) ❶	
		Switch body LA2-12/16	Switch Body LA2-20/25
0	44mm ❷	71.5 - 77.5	75 - 80.5
0	52mm	77 - 87	80 - 90
0	57mm	82 - 92	85 - 95
1	44mm ❷	99.5 - 101.5	99 - 105
1	52mm	97.5 - 111	101 - 114.5
1	57mm	102.5 - 116	106 - 119.5
2	44mm ❷	119.5 - 125.5	123 - 129
2	52mm	121.5 - 135	125 - 138.5
2	57mm	126.5 - 140	130 - 143.5
3	44mm ❷	143.5 - 149.5	147 - 153
3	52mm	145.5 - 159	149 - 162.5
3	57mm	150.5 - 164	154 - 167.5
4	44mm ❷	167.5 - 173.5	171 - 177
4	52mm	169.5 - 183	173 - 186.5
4	57mm	169.5 - 183	178 - 191.5
5	44mm ❷	191.5 - 197.5	195 - 201
5	52mm	193.5 - 207	197 - 210.5
5	57mm	198.5 - 212	202 - 215.5
6	44mm ❷	215.5 - 221.5	219 - 225
6	52mm	217.5 - 231	221 - 234.5
6	57mm	222.5 - 236	226 - 239.5

❶ For DIN rail mounted devices, remember to deduct the offset distance provided by the rail. For example, deduct 2.5mm from the Mounting Depth for switch bodies mounted on DIN 46277 rail.

❷ One 44mm End Shaft is supplied with all Switch Body Assemblies.

Metal shaft extension system


Adjustable metal shaft extensions snap on securely to LA2 switches via the same quick-connect design as shaft extension modules. Metal shafts are equipped with a door interlock and a padlock hasp for locking out the switch after the enclosure is opened (for outside lockout, select a Switch Handle Assembly with lockout capability).



Two standard lengths of these unique adjustable shafts are available. Metal shaft extensions mate with any of the standard Switch Handle Assemblies. All necessary hardware is supplied with the shaft.

Determining metal shaft extension

- Determine Mounting Depth. This is the distance from the inside mounting surface of the enclosure to the outside surface of the enclosure cover. See diagram below for details ❶.

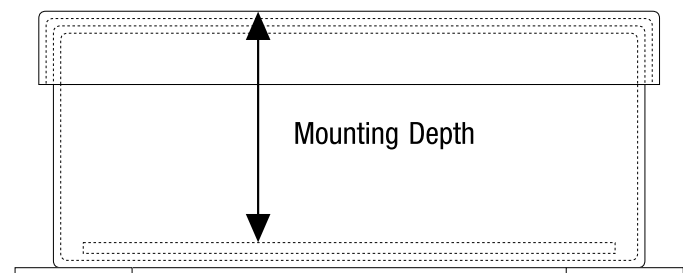

- If necessary convert Mounting Depth inches to millimeters (inches x 25.4 = millimeters).
 - In the Metal Shaft Extension Table to the right, find the Mounting Depth in the column under the appropriate LA2 Switch Body.
- NOTE: Table is based on an LA2 switch body with two wafers (3 or 4 pole). For a switch body with more or less wafers, add or subtract the following from overall Mounting Depth before referring to table:
- LA2-12/16 Switch Body- ±10mm per wafer
 - LA2-20/25 Switch Body- ±12.5mm per wafer
- Order the Metal Shaft Extension required for that Mounting Depth.

- ❶ For DIN rail mounted devices, remember to deduct the offset distance provided by the rail. For example, deduct 2.5mm from the Mounting Depth for switch bodies mounted on DIN 46277 rail.
- ❷ This dimension can be reduced by another 55mm by cutting the plastic sleeve and further cutting the metal shaft.

Metal Shaft Extension Components (LA2 Base Mount)

Component	Catalog Number
Short Metal Shaft  Length: 10 ... 235mm (4-21/64...9-1/4 in.)	LA2-G3393
Long Metal Shaft  Length: 230 ... 350mm (9-3/64...13-51/64 in.)	LA2-G3394
 Insert - For modifying metal shaft to switch position	LA2-G3398
 Insert - For modifying metal shaft to switch any position (not lockable)	LA2-G3399

Metal Shaft Extension Table

Metal Shaft Extension	Mounting Depth (mm) ❶	
	Switch body LA2-12/16	Switch Body LA2-20/25
LA2-G3393	178 ❷ - 309	181.5 ❷ - 312.5
LA2-G3394	298 - 424	301.5 - 427.5

K1

L2 Rotary Cam Switches

L2 Switch Accessories

Accessory	Description	Catalog No.
 (Plastic Reducer included)	End Shaft for LE switch - Replacement 44mm shaft supplied standard with all switches - Sold only in packages of 5. Order 5 pieces to receive 1 pkg of 5.	L2-G3380
	Terminal cover 3 or 4 pole LE2-12/16 LE2-20/25 LA2-12/16 LA2-20/25	LE2-12-C4 LE2-20-C4 LA2-12-C4 LA2-20-C4
	Standard knob Black 37.5mm Black 48mm Red 37.5mm Red 48mm	L2-G3154N L2-G3155N L2-G3154R L2-G3155R
	Padlockable knob Black Red	L2-G2864N L2-G2864R
	Type "P" knob Black Red	L2-G2888N L2-G2888R
	Self contained knob - allows mounting LE2 switches without Switch Handle Assembly IP40 protection IP65 protection	L2-G2851N L2-G2854N
	Legend Plate - Blank for engraving Silver For 48 x 48 (or 62) For 64 x 64 (or 78) Yellow For 48 x 48 (or 62) For 64 x 64 (or 78)	LL2-A-4-000 LL2-A-6-000 LL2-I-4-000 LL2-I-6-000

Accessory	Description	Catalog No.
	Switch handle assembly - for 45mm standard cutout O-I OFF-ON Blank	LFS2-P-4-175 LFS2-P-4-175I LFS2-P-4-000
	ABS Enclosure - For High Impact Applications (IP66, UL 94 Flame Resistance - HB) With pre-drilled holes for 64 x 64 operator or larger 95x150x86mm 95x150x111mm Without holes 95x150x86mm 95x150x111mm	LA2-G3572 LA2-G3573 LA2-G3574 LA2-G3575
	Noryl Enclosure - For Corrosion Prone Applications (IP66, UL 94 Flame Resistance - V0) With pre-drilled holes for 64 x 64 operator or larger 95x150x86mm 95x150x111mm Without holes 95x150x86mm 95x150x111mm	LA2-G3576 LA2-G3577 LA2-G3578 LA2-G3579


Enclosure Selection Guide

Determine switch & number of poles; order enclosure and shaft required


Base Mount Switch	Poles	Use Enclosure...	Shaft Required ❶
LA2-12 & 16	1	LA2-G357(2,4,6,8)	LA2-G3195
	2		Standard
LA2-20 & 25	1	LA2-G357(3,5,7,9)	LA2-G3194
	2		Standard
LA2-12 & 16	3	LA2-G357(3,5,7,9)	LA2-G3195
	4		LA2-G3194
	5		Standard
LA2-20 & 25	3		LA2-G3194
	4		Standard

❶ Order shafts from page K1:11.

Circuit Diagrams

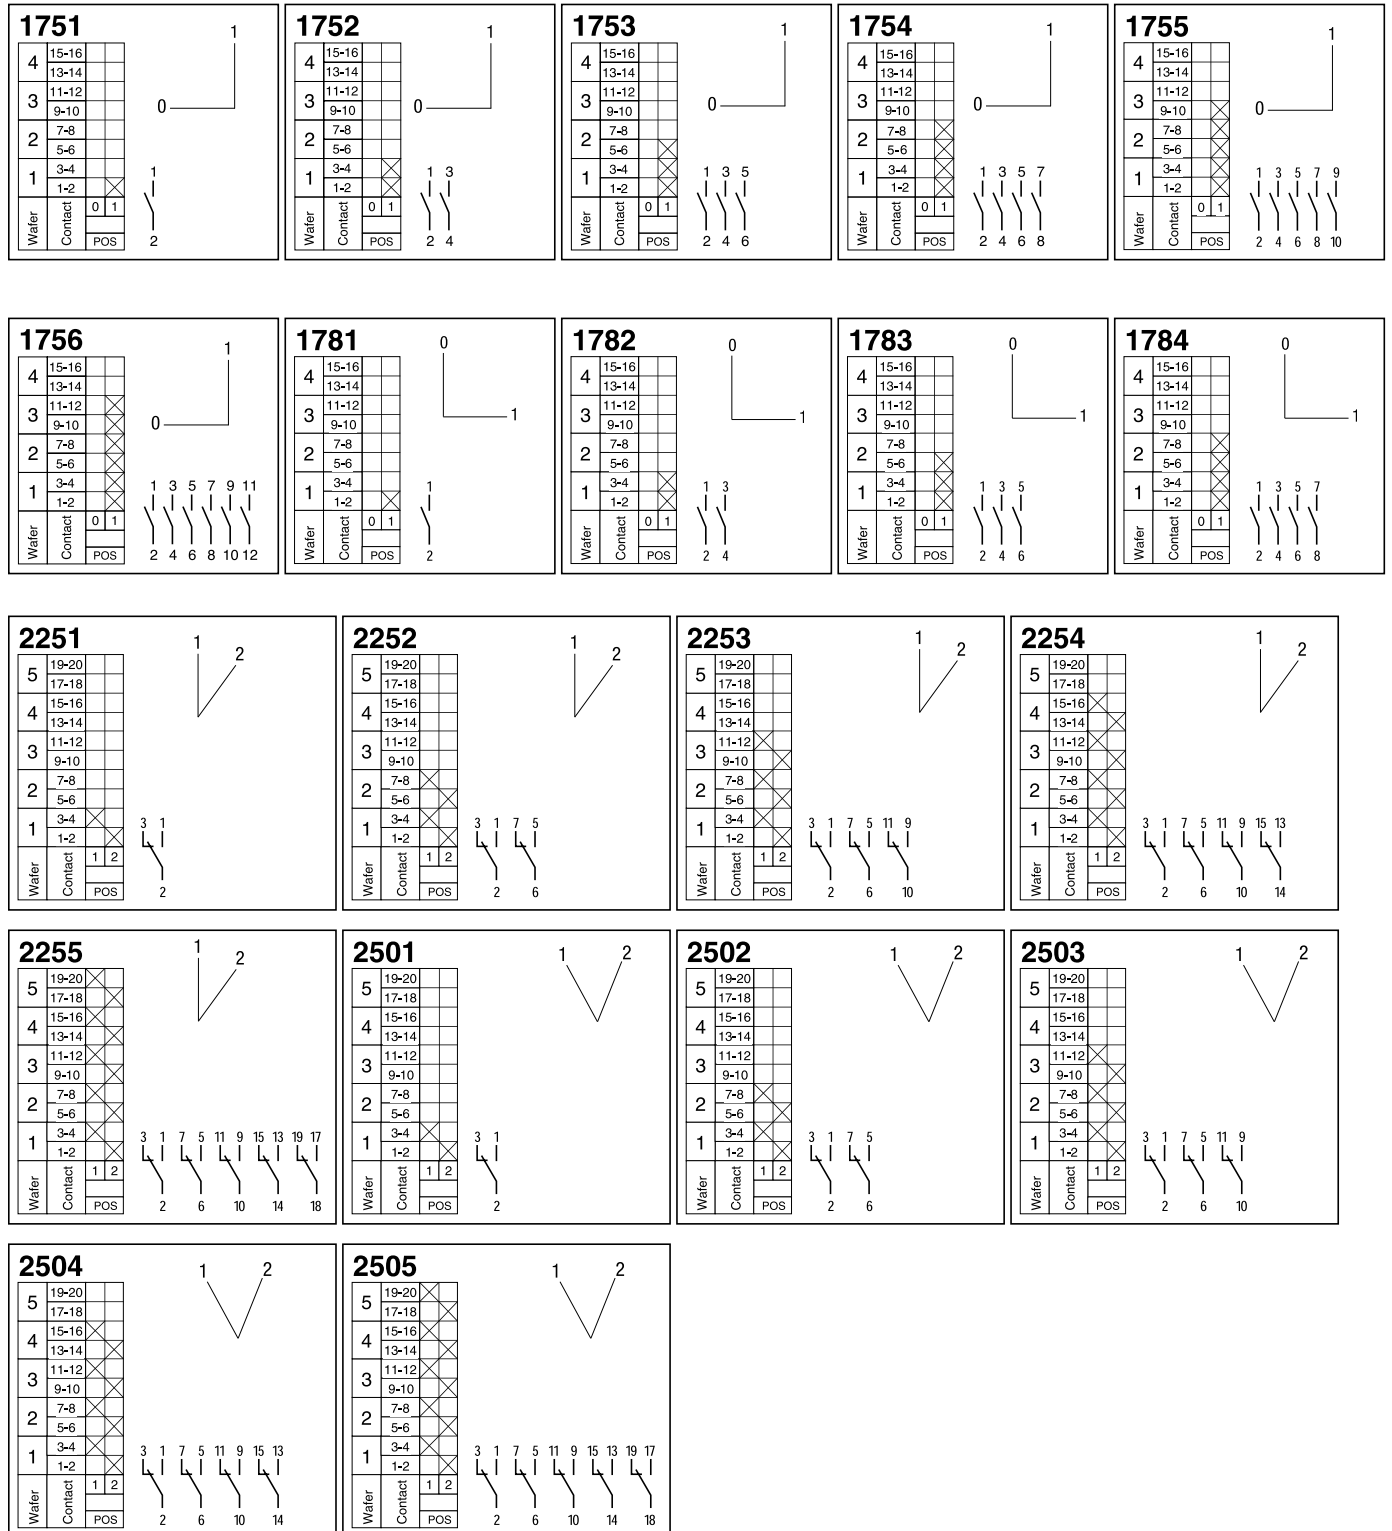

















Circuit Diagrams

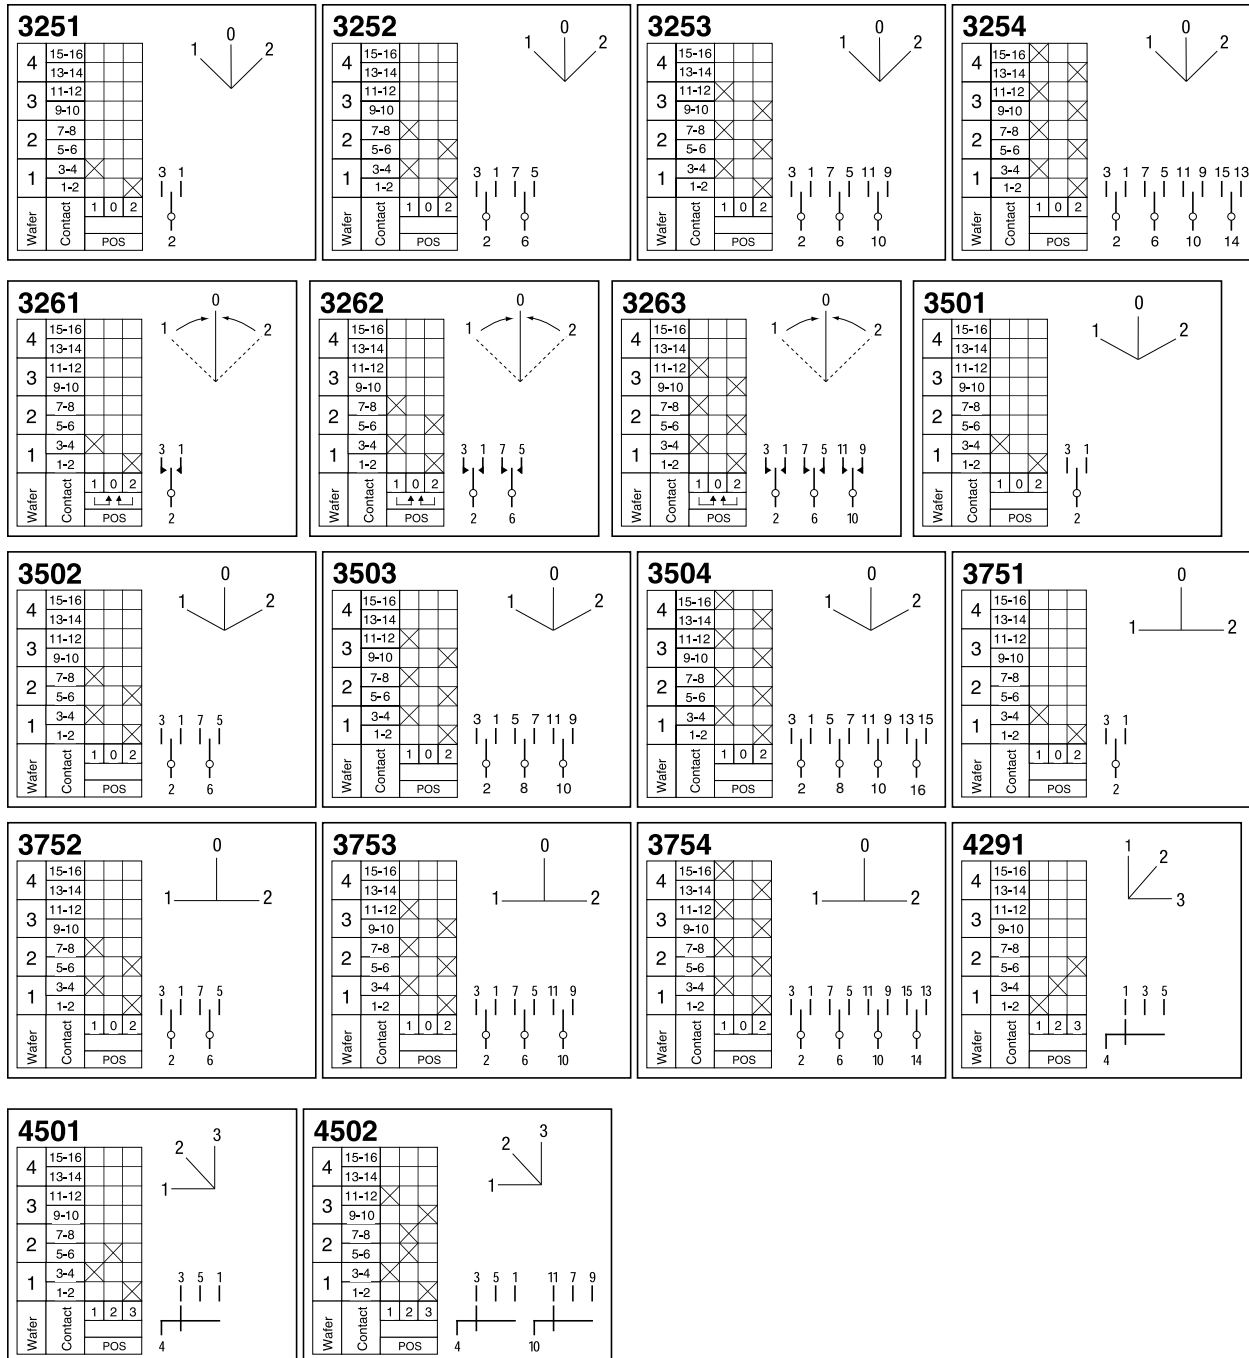

K1

L2 Rotary Cam Switches

Circuit Diagrams

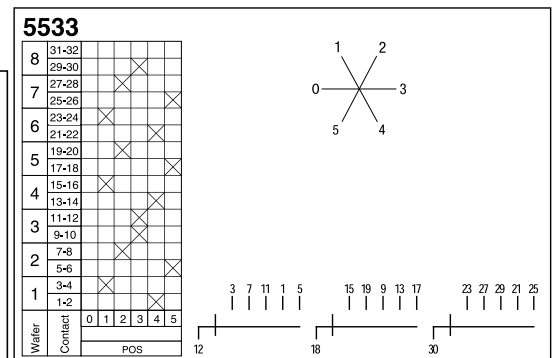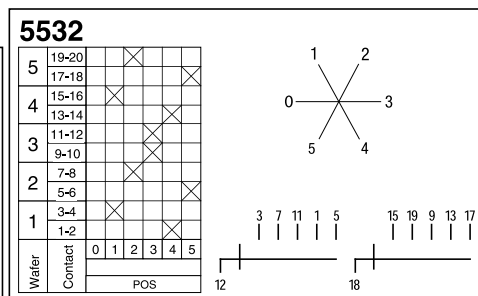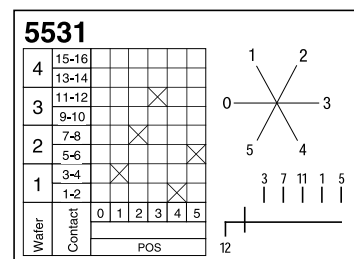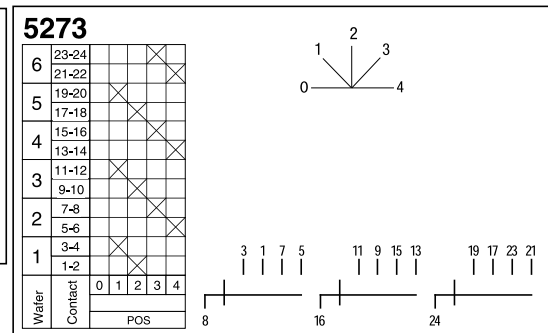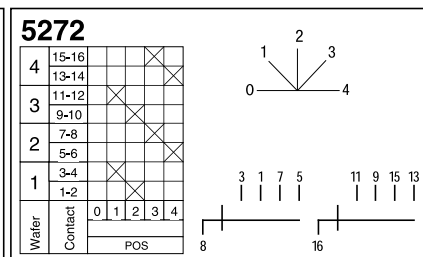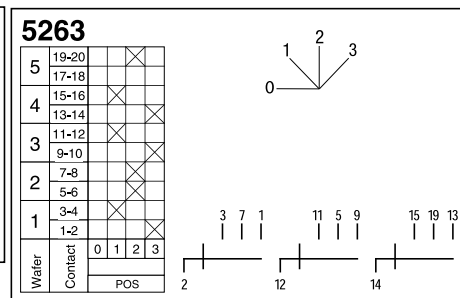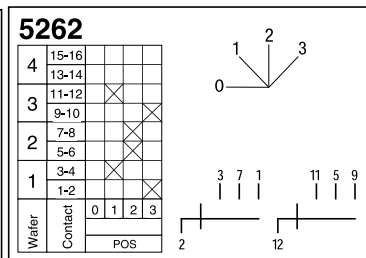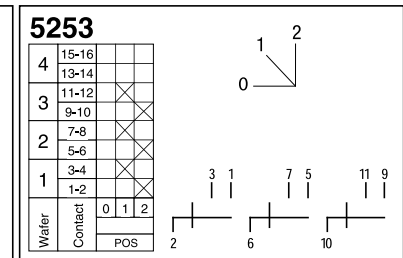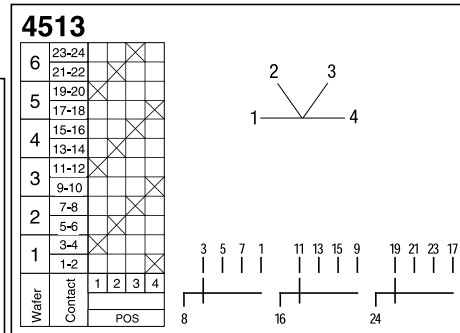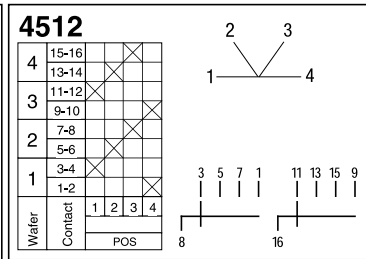


K1


L2 Rotary Cam Switches

Circuit Diagrams


7303

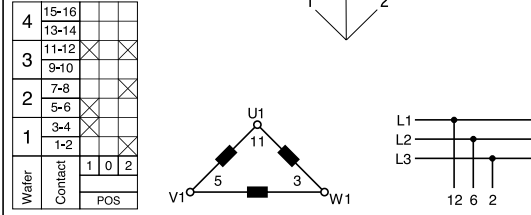


7293

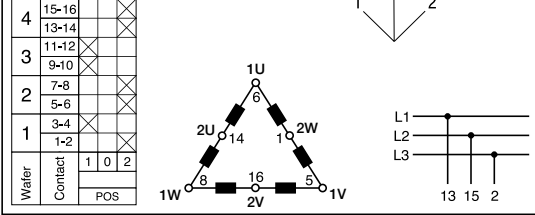


7543

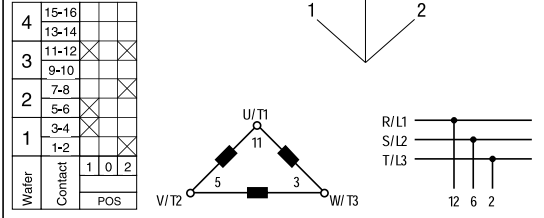


8251

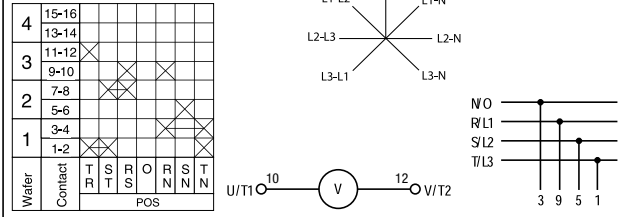


8271

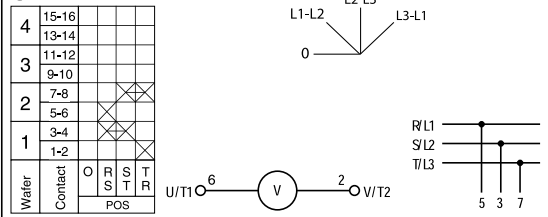


8751

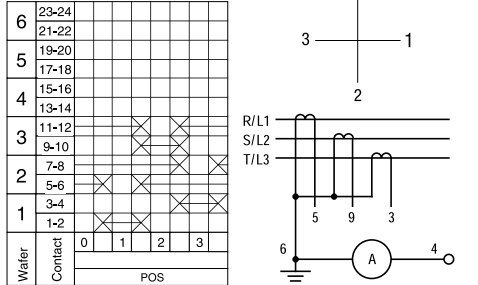

8752

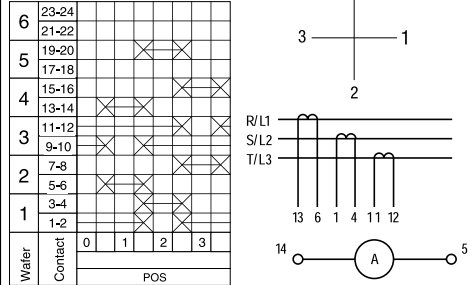

9251

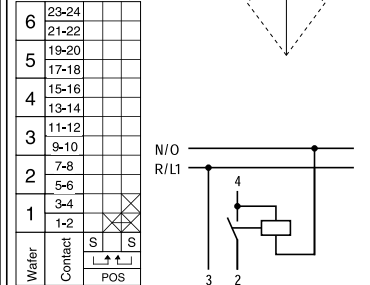

K1

L2 Rotary Cam Switches

Customer Information:

Today's Date: _____ Order Form _____ of _____

Name: _____

Company: _____

Address: _____

City: _____ State: _____ Zip: _____

Telephone: _____

Job Reference/PO #: _____

Price Adder applies: 1-4 5-19 20-99 100-199 200-499 500+

NOTE: Types "N" and "G" are not available with custom markings.

Ordering Instructions:

- 1) For reference only, enter the switch and handle assembly part numbers in the spaces to the right.
- 2) Based on your selection switch angle rotation, define the appropriate template figure and check mark the angle rotation (30/60/45/90°)
- 3) Enter the desired text in the spaces provides. Text limitation is defined by the amount of " _ " underlines provided per angle.
- 4) Use a new order form for each different custom nameplate.

SS-99-220-302

06/26/2016 CAS

Quantity required exactly like this one: _____


For Compatibility Verification please include the following:

Catalog Number of Switch to be used on

L			-			-			
---	--	--	---	--	--	---	--	--	--


Switch Handle Assembly to be used with

L				-		-					
---	--	--	--	---	--	---	--	--	--	--	--



☐ 30°

☐ 60°



☐ 45°

☐ 90°

Technical Information

UL/CSA				L2-12	L2-16	L2-20	L2-25		
General use									
1-phase/2-phase, 3-phase/3 poles		Rated current		600 V	12	16	20	25	
Heavy Pilot Duty		code designation		AC	A600	A600	~	~	
Standard Duty		code designation		DC	~	~	~	~	
Alternating Current (IEC / EN 60947-3)									
Rated Voltage U _e		IEC-EN / UL-CSA		(V)	690/600	690/600	690/600	690/600	
Rated Isolation Voltage U _i		IEC / UL-CSA		(V)	690/600	690/600	690/600	690/600	
Rated impulse voltage U _{imp}		IEC		(kV)	6	6	6	6	
Test voltage U _i 1 min.				(kV)	2.5	2.5	2.5	2.5	
Rated frequency				(Hz)	50/60	50/60	50/60	50/60	
Thermal rated current I _{th} open 40°C				(A)	16	20	25	30	
Thermal rated current I _{the} enclosed 60°C				(A)	12	16	20	25	
Wasted power by 1 pole at thermal rated current I _{the}				(W)	0.3	0.5	0.6	0.9	
Rated Operating Current I _e									
AC-1/ AC21A	Switching resistive loads with slight overload	IEC947	690V	(A)	12	16	20	25	
AC-1	Non-inductive or slightly inductive loads inductive loads	SEV	690V	(A)	12	16	20	25	
AC-22A	Switching mixed resistive and inductive loads at slight overload	IEC947							
			220-500V	(A)	12	16	20	25	
			600V	(A)	12	16	20	25	
AC-15	Switching magnetic drives, motors, valves and solenoids	IEC	220-240V	(A)	5	6	7	8	
			380-415V	(A)	3	4	5	6	
			500V	(A)	2	2.5	3	4	
Pilot Duty									
Rated current	Non-inductive or slightly inductive loads	UL/CSA – Heavy VAC UL/CSA ①		(A)	A600 12	A600 16	– 20	– 25	
Short Circuit Current									
	Max. fuse rating of circuit	(gL characteristic)		(A)	35	35	60	80	
	Rated conditional			(kA)	5	5	5	5	
Rated Operating Powers		IEC/VDE/BS							
AC-2	Slip ring motors, starting induction motors, reversing and plugging, wye-delta starting	3Ø 3 pole	240V	(kW)	3	4	5.5	5.5	
			380V	(kW)	5.5	7.5	9	13	
			415V	(kW)	5.5	7.5	9	13	
			440V	(kW)	5.5	7.5	9	13	
			500V	(kW)	7.5	10	11	15	
			660V	(kW)	7.5	10	11	15	
AC-3	Starting squirrel-cage motors, interruption while running	3Ø 3 pole	220-240V	(kW)	2.2	3	4.5	5.5	
			380-440V	(kW)	4	5.5	7.5	11	
			500V	(kW)	5.5	7.5	10	13	
			660V	(kW)	5.5	7.5	8	11	
			1Ø	110V	(kW)	0.75	1.1	1.2	1.6
			2 pole	220-240V	(kW)	1.3	2.2	2.5	3.2
			380-440V	(kW)	2.2	3.7	4.5	5.5	

① Suitable for switching off load (AC-20) above 660V, but only up to 660V for switches with screws at the rear (LE switches).

Technical Information


										L2-12	L2-16	L2-20	L2-25	
Rated Operating Loads (cont.)		IEC/VDE/BS												
AC-4	Starting squirrel-cage motors, reversing, braking, plugging	3Ø	220-240V	(kW)						0.75	1.5	3	4	
		3 pole	380-415V	(kW)						1.5	2.2	3.7	5.5	
			440-550V	(kW)						1.5	2.2	3.7	5.5	
			660V	(kW)						—	—	—	—	
AC-23A	Periodic switching of motors or other highly inductive loads.	3Ø	220-240V	(kW)						2.2	3	4.5	5.5	
		3 pole	380-440V	(kW)						4	5.5	7.5	11	
			500V	(kW)						5.5	7.5	10	13	
			660V	(kW)						5.5	7.5	8	11	
			1Ø	110V	(kW)						0.75	1.1	1.2	1.6
		2 pole	220-240V	(kW)						1.3	2.2	2.5	3.2	
			380-440V	(kW)						2.2	3.7	4.5	5.5	
			Rated Power		UL/CSA								(FLA)	(FLA)
Normal motor load full voltage rating (similar to AC-3)			120V	(HP)						1 (7.2)	1.5 (12.0)	2 (13.6)	3 (19.2)	
		3Ø	240V	(HP)						2 (6.8)	3 (9.6)	4 (12.4)	6 (18.0)	
		3 pole	480V	(HP)						5 (7.6)	7.5 (11.0)	8 (11.6)	12 (17.0)	
			600V	(HP)						5 (6.1)	7.5 (9.0)	10 (11.0)	15 (17.0)	
			1Ø	120V	(HP)						0.5 (9.8)	0.75 (13.8)	1 (16)	1.5 (20.0)
		2 pole	240V	(HP)						1 (8.0)	1.5 (10.0)	2 (12)	3 (17.0)	
DC Switch Ratings			Contacts in Series											
			1	2	3	4	5	6	8					
Rated Current I_e														
DC-21A	For resistive loads $T \leq 1\text{ms}$ $U_{e\text{max}} = 600\text{V}$	Rated Voltage [V]	24	48	72	96	120	144	192	[A]	12	16	20	22
			48	96	144	192	240	288	384	[A]	10	12	16	18
			60	120	180	240	300	360	450	[A]	8	10	12	14
			110	220	330	440	550	660	—	[A]	2	2.5	4	5
			220	440	660	—	—	—	—	[A]	0.5	0.6	0.7	0.8
			440	—	—	—	—	—	—	[A]	0.4	0.4	0.5	0.5
Rated Making/Breaking Capacity			($\approx 1.5 \times I_e$)											
	For resistive loads $T \leq 1\text{ms}$ $U_{e\text{max}} = 600\text{V}$	1.05 x rated voltage [V]	25.2	50.4	75.6	100.8	126	151.2	201.6	[A]	18	24	30	33
			50.4	100.8	151.2	201.6	252	302.4	403.2	[A]	15	21	24	27
			63	126	189	252	315	378	504	[A]	12	18	18	21
			115.5	231	346.5	462	577.5	—	—	[A]	3	4.5	6	7.5
			231	462	—	—	—	—	—	[A]	0.75	1.12	1.05	1.2
			462	—	—	—	—	—	—	[A]	0.52	0.78	0.47	0.75
Rated Current I_e														
	For inductive loads $T = 50\text{ms}$ $U_{e\text{max}} = 600\text{V}$	Rated voltage [V]	24	48	72	96	120	144	192	[A]	8	10	12	14
			30	60	90	120	150	180	240	[A]	4.5	5.5	7	8
			48	96	144	192	240	288	384	[A]	1.5	2	2.5	3
			60	120	180	240	300	360	450	[A]	1	1.2	1.5	1.8
			110	220	330	440	550	660	—	[A]	0.4	0.5	0.6	0.7
Rated Making/Breaking Capacity			($\approx 1.1 \times I_e$)											
	For inductive loads $T = 50\text{ms}$ $U_{e\text{max}} = 600\text{V}$	1.1 x rated voltage [V]	26.4	52.8	79.2	105.6	132	158.4	184.8	[A]	8.8	11	13.2	15.4
			33	66	99	132	165	198	231	[A]	4.95	6.05	7.7	8.8
			52.8	105.6	158.4	211.2	264	316.8	369.6	[A]	1.65	2.2	2.75	3.3
			66	132	198	264	330	396	462	[A]	1.1	1.32	1.65	1.98
			121	242	363	484	605	—	—	[A]	4.95	6.05	7.7	8.8
Rated Power P_e														
DC-23A, DC-3, DC-5	For inductive loads $T \leq 1\text{ms}$	Rated voltage [V]	Contacts in Series											
			1							[kW]	0.12	0.15	0.20	0.25
			2							[kW]	0.20	0.25	0.30	0.37
			2							[kW]	0.25	0.30	0.37	0.50
			3							[kW]	0.30	0.37	0.50	0.75
			2							[kW]	0.25	0.30	0.37	0.50
			4							[kW]	0.37	0.50	0.75	1.00
			4							[kW]	0.50	0.75	1.00	1.20
			6							[kW]	1.00	1.20	1.40	1.60
			4							[kW]	0.37	0.50	0.75	1.00
			6							[kW]	1.00	1.20	1.40	1.50

Technical Information


				L2-12	L2-16	L2-20	L2-25
Rated Making/Breaking Capacity (=4 x I _e)							
DC-23A, DC-3, DC-5 For inductive loads T ≤ 7.5ms	1.05 x rated voltage [V]	Contacts in Series					
	25.2	1	[kW]	20.0	25.0	33.3	41.6
	25.2	2	[kW]	33.3	41.6	50.0	61.6
	50.4	2	[kW]	21.0	25.0	30.8	41.6
	50.4	3	[kW]	25.0	30.8	42.0	62.4
	63	2	[kW]	16.6	20.0	24.6	33.2
	63	4	[kW]	24.6	33.3	50.0	66.4
	115.5	4	[kW]	18.1	27.2	36.4	44.0
	115.5	6	[kW]	36.4	43.6	51.0	58.2
	231	4	[kW]	6.7	9.1	13.6	18.2
	231	6	[kW]	18.1	21.8	25.2	27.2
Maximum Wire Gauges							
Rigid Wire			AWG	(2)18...12	(2)18...12	(2)16...10	(2)16...10
			[mm ²]	(2)1...2.5	(2)1...2.5	(2)1.5...6	(2)1.5...6
Fine Strands			AWG	(2)18...12	(2)18...12	(2)16...10	(2)16...10
			[mm ²]	(2)1...2.5	(2)1...2.5	(2)1.5...4	(2)1.5...4
Max. Torque Ratings							
				[lb-in]	9	10.6	10.6
				[Nm]	1	1.2	1.2
Protection Class							
Switch Handle Assembly							
LFS2-G(N)-6...	UL		Type 12	Type 12	Type 12	Type 12	Type 12
All others	IEC 529		IP66	IP66	IP66	IP66	IP66
Switch Body	IEC 529		IP20	IP20	IP20	IP20	IP20
Mechanical Life				Millions of operations	1	1	1
Rated Breaking Capacity	220V	(A)	72	96	128	176	
	Power factor		0.65	0.65	0.65	0.35	
	380V	(A)	72	96	128	176	
	Power factor		0.65	0.65	0.65	0.35	
	660V	(A)	53	72	86	112	
	Power factor		0.65	0.65	0.65	0.65	
Ambient Temperature				(F°)	(F°)	(F°)	(F°)
Operation	Min...Max	(C°)	-25...+60 (-13...+140)	-25...+60 (-13...+140)	-25...+60 (-13...+140)	-25...+60 (-13...+140)	-25...+60 (-13...+140)
	Storage only	Min...Max	(C°)	-40...+80 (-40...+176)	-40...+80 (-40...+176)	-40...+80 (-40...+176)	-40...+80 (-40...+176)
Maximum Altitude (without derating)				(m)	≤2000	≤2000	≤2000
				(ft.)	≤6561	≤6561	≤6561
Maximum Mechanical Operations (without derating)				(cycle/hr.)	1200	1200	1200
Maximum Electrical Operation (without derating)				(cycle/hr.)	120	120	120

LE2 Panel Mount - Screw Fixing

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

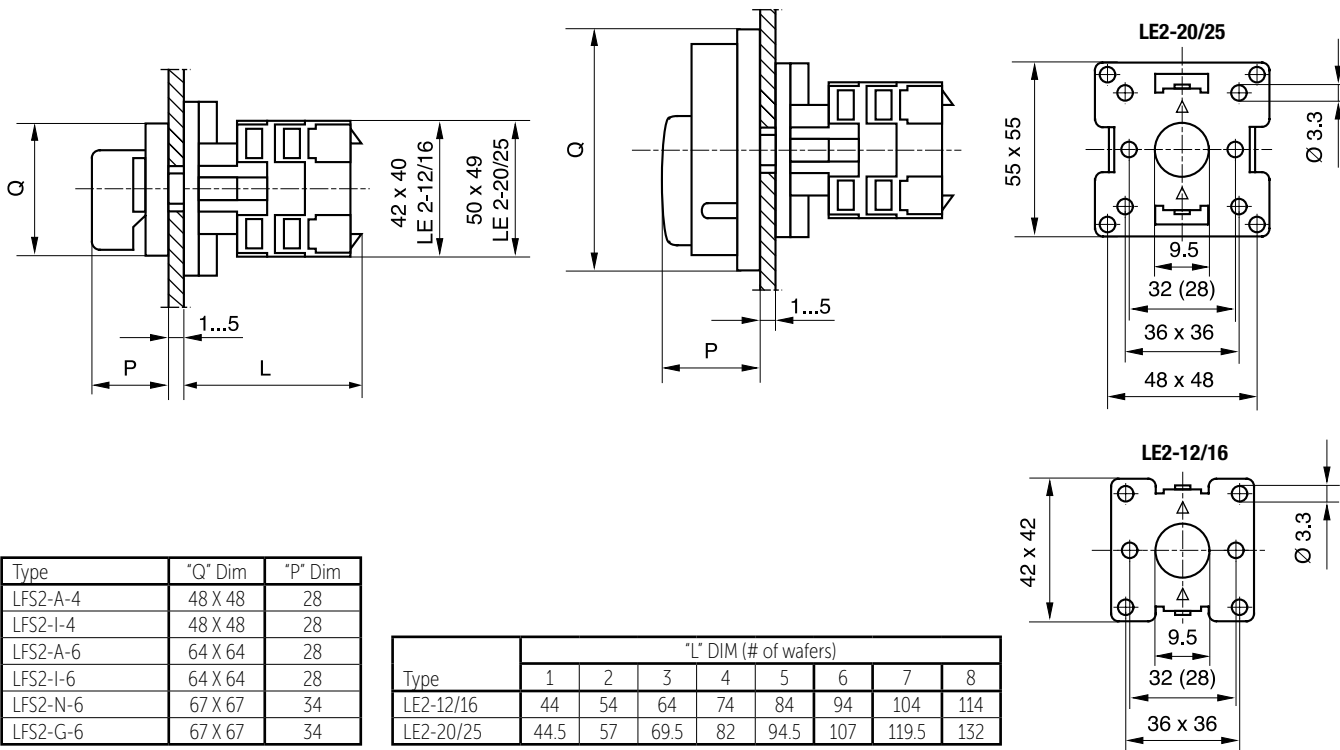


LE2 Panel Mount - Central Nut Fixing

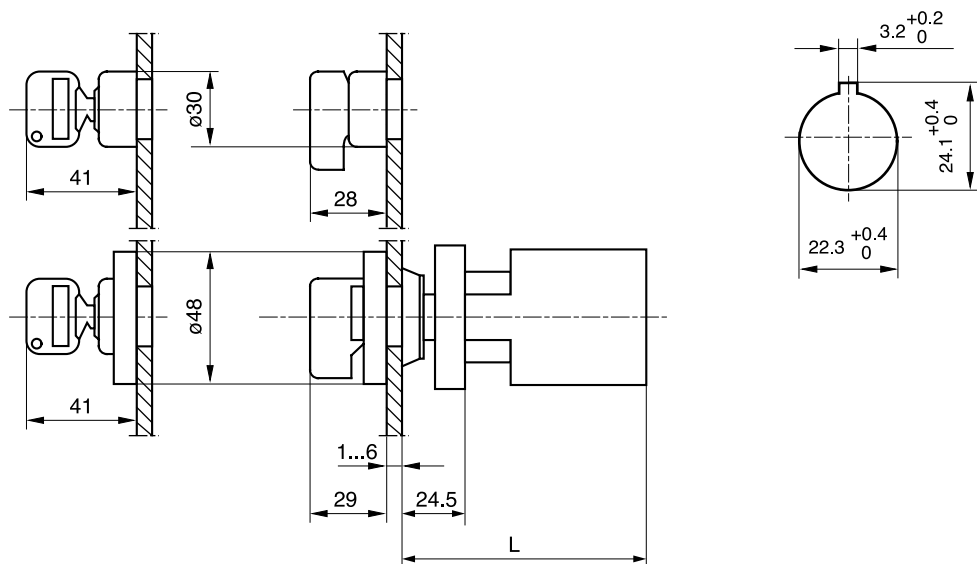

LA2 Base Mount

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

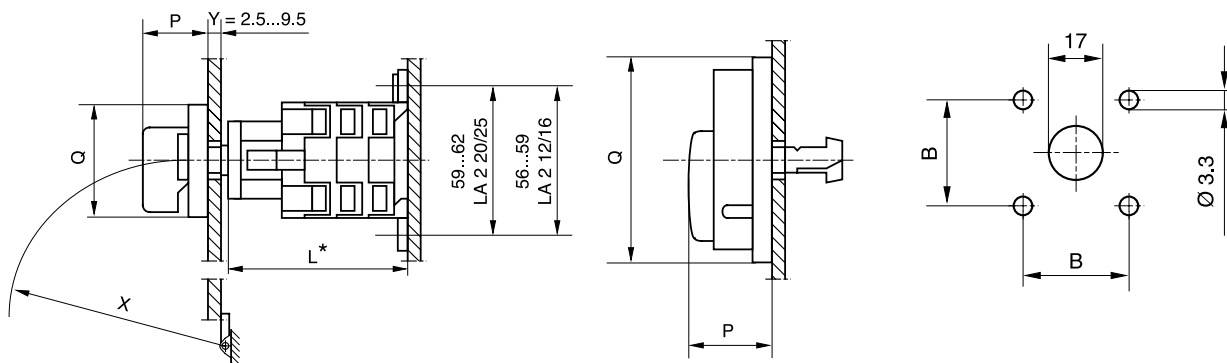


Type	"Q" Dim	"P" Dim	"B" Dim
LFS2-A-4	48 X 48	28	36
LFS2-I-4	48 X 48	28	36
LFS2-A-6	64 X 64	28	48
LFS2-I-6	64 X 64	28	48
LFS2-N-6	67 X 67	34	48
LFS2-G-6	67 X 67	34	48

Type	"L" DIM (# of wafers)			
	1	2	3	4
LA2-12/16	58	68	78	88
LA2-20/25	59	71.5	84	96.5

* Add 2.5mm for DIN rail 46277.

LA2 Base Mount with Modular Shaft Extensions

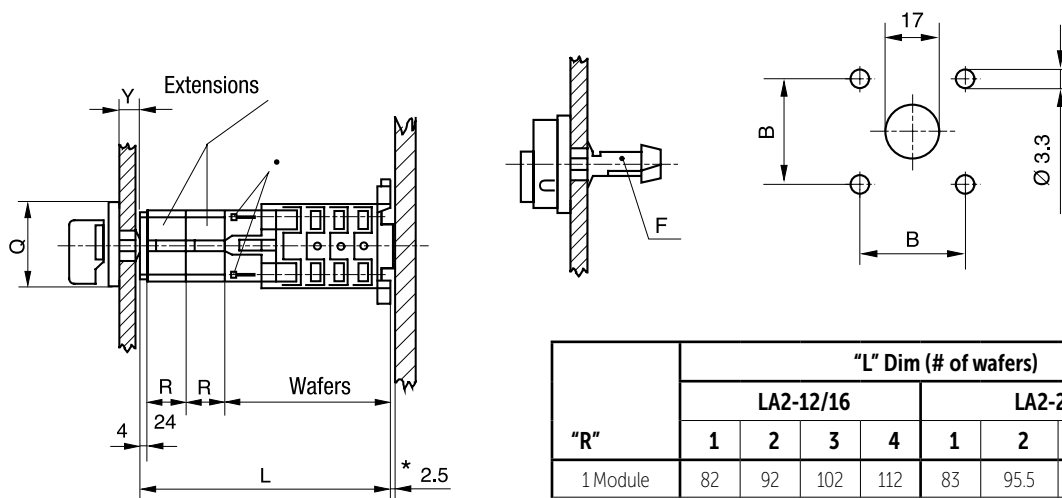

Type	"Q" Dim	"B" Dim
LFS2-A-4	48 X 48	36
LFS2-I-4	48 X 48	36
LFS2-A-6	64 X 64	48
LFS2-I-6	64 X 64	48
LFS2-N-6	67 X 67	48
LFS2-G-6	67 X 67	48

Shaft "F"	"Y" Dim
LA2-G2830	2.5-9.5
LA2-G3194	9 - 18
LA2-G3195	14 - 23


"R"	"L" Dim (# of wafers)							
	LA2-12/16				LA2-20/25			
	1	2	3	4	1	2	3	4
1 Module	82	92	102	112	83	95.5	108	120.5
2 Modules	106	116	126	136	107	119.5	132	144.5
3 Modules	130	140	150	160	131	143.5	156	168.5
4 Modules	154	164	174	184	155	167.5	180	192.5
5 Modules	178	188	198	208	179	191.5	204	216.5
6 Modules	202	212	222	232	203	215.5	228	240.5

* Add 2.5mm for DIN rail 46277.

• With more than 4 modules attach the first one to the switch with the screws supplied with the LA2-G2853.

LA2 Base Mount with Metal Shaft Extension

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

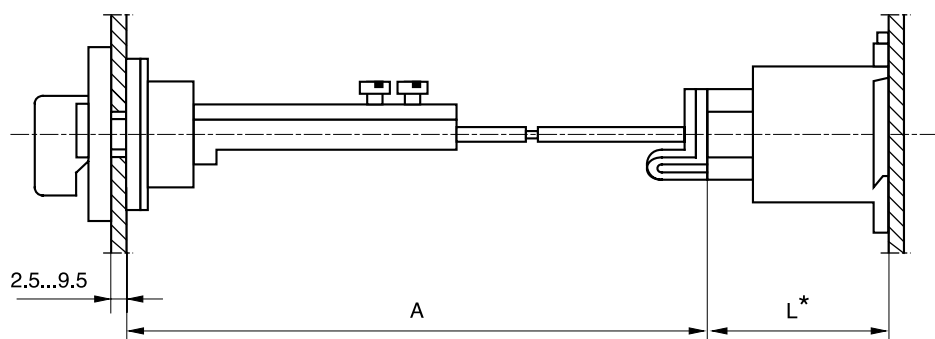


Type	"L" DIM (# of wafers)			
	1	2	3	4
LA2-12/16	54	64	74	84
LA2-20/25	55	67.5	80	92.5

Type	"A" Dim
LA2-G3393	110 - 235
LA2-G3394	230 - 350

* Add 2.5mm for DIN rail 46277.

LA2 Base Mount with LFS2-P-4

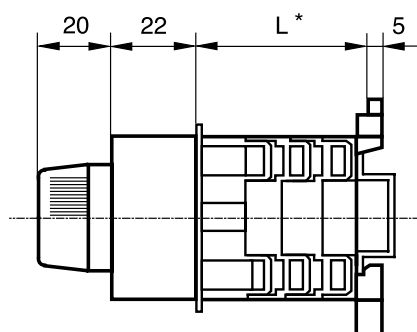

Type	"L" DIM (# of wafers)			
	1	2	3	4
LA2-12/16	35	45	55	65
LA2-20/25	35.5	48	60.5	73

* Add 2.5mm for DIN rail 46277.