

R-Line Series 40 Amp Rotary Cam Switches

Rugged and dependable
40 amp switches for
industrial applications



Sprecher + Schuh's rugged R-Line rotary cam switches are available for most control and load applications up to 40 amps. A well thought out ordering system provides many standard and nonstandard configurations, that are often available "off the shelf." Many popular switching configurations are offered from stock.

...For many applications

R-Line control and load switches comply with the most important international standards for use as:

- **Changeover Switches** - for switching between alternate electrical supplies.
- **ON/OFF switches** - to connect and disconnect any electrical supply.
- **Multi-position load switches** - for the step control of loads such as heaters and furnaces.
- **Motor load disconnect switches** - for safely isolating circuits during repair and maintenance.
- **Reversing switches** - to change the direction or rotation of a motor.
- **Wye-Delta switches** - To manually control reduced voltage starting of a motor.

Rugged quality

The R-Line's sturdy design incorporates a positive switching action with a clearly defined switch position. The contact assemblies themselves are brass plated and have generous copper content to help dissipate heat.

Solid connections

The terminal connections are a captive screw design with self-lifting saddle clamps. The saddle clamp design guarantees reliable connections on the R-40. The switch connection terminals are finger safe with IP20 protection.















Choose from various switch handle assemblies









Switch handle assemblies for our Changeover and ON-OFF switches are available with either traditional screw fixing or central nut fixing system. All switch handles offer Type 12 IP66 protection. A UL 4X handle is also available, ordered separately.

K2

R40 Rotary Cam Switches

R-Line Front Mounted 40 Amp Rotary Switches with Handle ❶

Switch Description				Catalog Number
Switch Handle Type 12/ IP66 ③	Function ②	Switch Angle	Poles/ Switch Wafers	
ON - OFF				
 <i>Screw Fixing</i>		90°	1 / 1	RE40-1751-A
		90°	2 / 1	RE401752A
		90°	3 / 2	RE401753A
		90°	4 / 2	RE401754A
		90°	6 / 3	RE-40-1756-A
 <i>Screw Fixing</i>		90°	3 / 2	RE401753N
		90°	4 / 2	RE-40-1754-N
		90°	6 / 3	RE-40-1756-N
 <i>Central Nut Fixing</i>		90°	2 / 1	RC401752B
		90°	3 / 2	RC401753B
		90°	4 / 2	RC401754B
		90°	6 / 3	RC401756B
 <i>Central Nut Fixing</i>		90°	2 / 1	RC401752DD
		90°	3 / 2	RC401753DD
		90°	4 / 2	RC401754DD
		90°	6 / 3	RC401756DD
Changeover				
 <i>Screw Fixing</i>		45°	1 / 1	RE-40-3251-A
		45°	2 / 2	RE-40-3252-A
		45°	3 / 3	RE403253A
		45°	4 / 4	RE403254A
 <i>Screw Fixing</i>		45°	3 / 3	RC-40-3253-B
		45°	4 / 4	RC-40-3254-B
 <i>Central Nut Fixing</i>		45°	3 / 3	RC-40-3253-DC
		45°	4 / 4	RC-40-3254-DC

Switch Body Description				Catalog Number
Switch Handle Type 12/ IP66 ❸	Function ❷	Switch Angle	Poles/ Switch Wafers	
Step				
 Screw Fixing		45°	1 / 2	RE40-5261-A
Reversing				
 Screw Fixing		45°	3 / 3	RE407303A
Wye-Delta				
 Screw Fixing		45°/90°	3 / 4	RE40-7323-A
Single Winding (Two Speed)				
 Screw Fixing		45°	3 / 4	RE407293A





See **Ordering Instructions** on next page. ➡

❶ Rated current can be lower depending on application. Check R-Line Technical Section before selecting switch size.

❷ See K2:7 for Circuit Diagrams.

❸ See page K1:8 for description of switch handles.

R-Line Base Mounted 40 Amp Rotary Switches with Handle ❶

Switch Body Description				Catalog Number ❷
Switch Handle Type 12/ IP66 ❸	Function	Switch Angle	Poles/ Switch Wafers	
ON-OFF				
		90° 90° 90°	3 / 2 4 / 2 6 / 3	RA401753A RA401754A RA401756A
Screw Fixing				
		90° 90° 90°	3 / 2 4 / 2 6 / 3	RA401753N RA401754N RA401756N
Screw Fixing				

A UL Type 4X switch handle is available for RA-40 switches. First select switch from this page, then turn to Accessories Section (page K2:4) and order Type R switch handle separately.

Ordering Instructions

RE40		1753		A	
Switch Configuration		Circuit Diagram # ❷		Handle Code ❸	for use with
RE Front (Panel) Mounted 40 amp switch		1751-1756	ON-OFF	A - Type A	RE/RA switch
		3251-3504	Changeover	B - Type B ❹	RC switch
RA Base Mounted 40 amp switch		5261	Step	N - Type N	RE/RA switch
		7293	Single Winding	DC - Type DC ❹	RC switch
		7303	Reversing	DD - Type DD ❹	RC switch
RC Front (Panel) mounted Central Nut fixing		7323	Wye-Delta		

Catalog numbers include a complete switch and handle kit.








❶ Rated current can be lower depending on application. Check R-Line Technical Section before selecting switch size.






❷ See K2:7 for Circuit Diagrams.

❸ See page K1:8 for description of switch handles.

❹ Not available on RA-40 Base Mounted switches.

R-Line Switch Accessories

Accessory	Description	Catalog No.
 (Reducer not included)	Replacement Shaft for RE switch (One supplied with each LE switch)	L2-G3380
	Standard knob 37.5 mm Black Red 48 mm Black Red	L2-G3154N L2-G3154R L2-G3155N L2-G3155R
	Padlockable knob Black Red	L2-G2864N L2-G2864R
	Self-contained knob allows mounting RE-40 switches without Switch Handle Assembly IP40 protection IP65 protection	L2-G2851N L2-G2854N
 LFS2-N	"ON-OFF" Switch Handle Assembly Type 12, IP66, accepts 3 padlocks Yellow and Red Gray and black	LFS2-N-6-175 LFS2-G-6-175
	Type R "ON-OFF" Switch Handle Assembly ① Screw fixing. Type 3R, 3, 12, 4, 4X, and IP66 Black and Black Yellow and Red	LA7-SB LA7-SY
	Type R "ON-OFF" Switch Handle Assembly ② Screw fixing. Type 3R, 3, 12, 4, 4X, and IP66 Black and Black Yellow and Red	L11-PB L11-PY

Accessory	Description	Catalog No.
	Front frame (blank nameplate)	L2-G3196
	Legend plate - blank for engraving Silver Yellow	LL2-A-6-000 LL2-I-6-000
	Legend plate - O - I, 90° Yellow	LL2-I-6-175
	Terminal cover - 3 or 4 pole For RA-40 For RE-40	RA-40-C4 RE-40-C4
	Dust Cover (not IP rated) FOR RE-40 1 or 2 switch wafers 3 or 4 switch wafers 5 or 6 switch wafers	RE-G3180 RE-G3181 RE-G3182

① Switch handle can be field modified to be defeatable or non-defeatable.
② Handles LA7-S_ and L11-P_ require R-type Switch Handle Shaft Extension. See page L1:13.


Modular Shaft Extension system ①

Shaft Extension Modules are ideal for lengthening the shaft of an RA-40 switch up to 144mm (≈5.5"). These rugged polycarbonate modules are 24mm (≈15/16") long and snap on "piggyback" to one another without the use of tools. Strong center shafts interlock as each module is snapped together. The standard 44mm end shaft supplied with every RA-40 switch connects the last Extension Module to the Switch Handle Assembly. End shafts of 52 and 57mm are also available, making this modular system versatile, fast and economical. Shaft Extension Modules are supplied two per package.



Determining modular shaft extension components

- Determine mounting depth. This is the distance from the inside mounting surface of the enclosure to the **outside surface** of the enclosure cover. See diagram below for details.

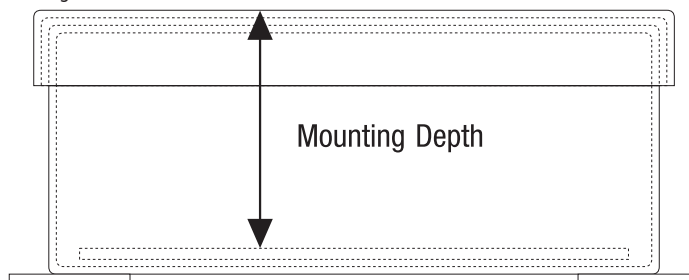

- If necessary, convert mounting depth inches to millimeters (inches x 25.4 = millimeters).
- In the Modular Shaft Extension Table to the right, find the correct range for your enclosure in the Mounting Depth column.

NOTE: Table is based on an RA-40 switch body with two wafers (3 or 4 pole). For a switch body with more or less wafers, add or subtract the following from overall Mounting Depth before referring to table:

RA-40 Switch Body - ±17.5mm per wafer

- Order the End Shaft and number of Extension Modules required for that mounting depth.

Modular Shaft Extension Components (RA40 Base Mount)

Component	Catalog Number
44mm End Shaft (supplied with RA-40 Switch Body Assembly)	LA2-G2830
52mm End Shaft	LA2-G3194
57mm End Shaft	LA2-G3195
Extension Module (two per pkg - priced per pkg)	LA2-G2853

Modular Shaft Extension Table

Number of Extension Modules	Required End Shaft	Mounting Depth (mm)
		Switch Body RA-40
0	44mm ②	98.5 - 104.5
0	52mm	100.5 - 114
0	57mm	109 - 119
1	44mm ②	122.5 - 128.5
1	52mm	124.5 - 138
1	57mm	133 - 143
2	44mm ②	146.5 - 152.5
2	52mm	148.5 - 162
2	57mm	157 - 167
3	44mm ②	170.5 - 176.5
3	52mm	172.5 - 186
3	57mm	181 - 191
4	44mm ②	194.5 - 200.5
4	52mm	196.5 - 210
4	57mm	205 - 215

① For Type R (4X) switch handle shaft extensions, see "Type R Switch Handle Extension" table on page K2:6.

② One 44mm End Shaft is supplied with all Switch Body Assemblies.

Metal shaft extension system ①


Adjustable metal shaft extensions snap on securely to RA-40 switches via the same quick-connect design as shaft extension modules. Metal shafts are equipped with a door interlock and a padlock hasp for locking out the switch after the enclosure is opened (for outside lockout, select a Switch Handle with lockout capability).



Two standard lengths of these unique adjustable shafts are available. Metal shaft extensions mate with any of the standard Switch Handles. All necessary hardware is supplied with the shaft.



Determining metal shaft extension

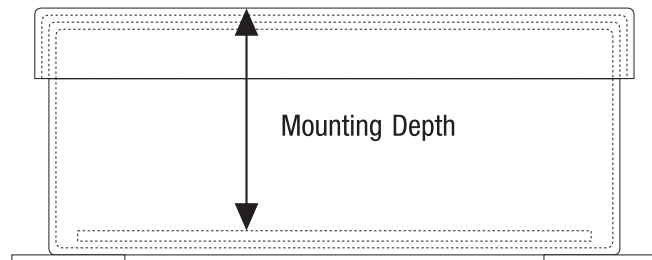- Determine Mounting Depth. This is the distance from the inside mounting surface of the enclosure to the **outside surface** of the enclosure cover. See diagram below for details.



- If necessary convert Mounting Depth inches to millimeters (inches x 25.4 = millimeters).
 - In the appropriate table to the right, find the correct range for your enclosure in the Mounting Depth column.
- NOTE:** Tables are based on an RA-40 switch body with two wafers (3 or 4 pole). For a switch body with more or less wafers, add or subtract the following from overall Mounting Depth before referring to table:
- RA-40 Switch Body- ±17.5mm per wafer
- Order the Metal Shaft Extension required for that Mounting Depth and switch handle.

Metal Shaft Extension Components (RA40 Base Mount)


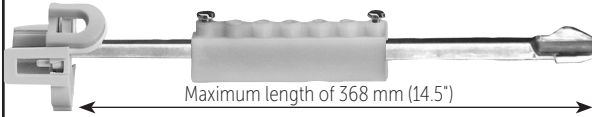
Component	Catalog Number
Short Metal Shaft  Length: 10 ... 235mm (4-21/64...9-1/4 in.)	LA2-G3393
Long Metal Shaft  Length: 230 ... 350mm (9-3/64...13-51/64 in.)	LA2-G3394

Metal Shaft Extension Table

Metal Shaft Extension	Mounting Depth (mm)
	Switch Body RA-40
LA2-G3393	205 - 336
LA2-G3394	325 - 451


Type R Switch Handle Shaft Extensions ③

Only select shaft extension from this table if ordering the Type R (UL Type 4X) Switch Handle from the Accessories Section (page K2:4). Select shaft after figuring overall Mounting Depth.

Type R Switch Handle Shaft Extension (typical) 	
Mounting Depth (mm)	Catalog Number
Switch Body RA-40	
119 - 143	LA7-S-67
142 - 166	LA7-S-90
149 - 173	LA7-S-97
167 - 191	LA7-S-115
Adjustable R-type Switch Handle Shaft Extension (LA7-S1-P shown)  Maximum length of 368 mm (14.5")	
119 - 191	LA7-S1-P
Includes all parts except L11-S1 shaft, order separately	LA7-NS-P

- Not for Type R (UL 4X) switch handles. Use Type R Switch Handle Extension table on this page.
- This dimension can be reduced by another 55mm by cutting the plastic sleeve and further cutting the metal shaft.
- Shaft included in package is designed for LA7-S_ and L11-P_ only. Not designed for use with previous L10-H_ handles.

Circuit Diagrams

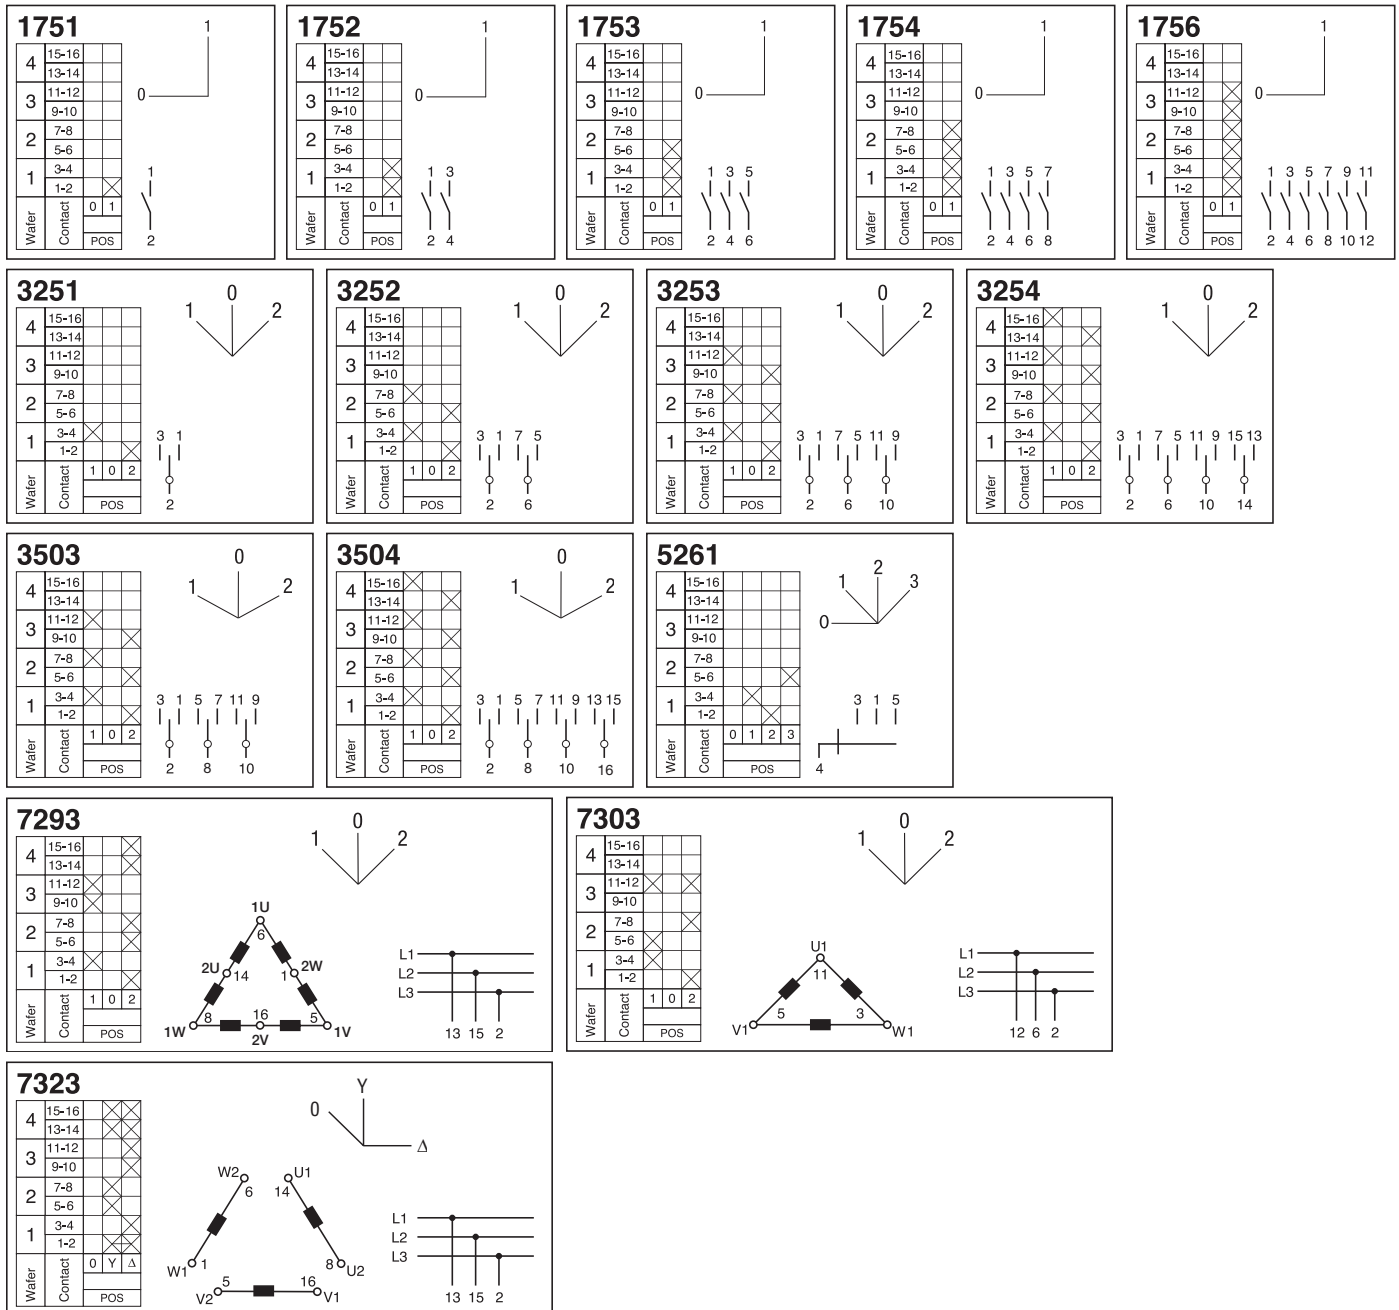

Technical Information

					R-40
Rated Operating Voltage		UL/CSA	[V]	600	
		IEC/VDE/BS	[V]	690	
Rated Isolation Voltage					
Impulse			[V]	8	
Continuous				690	
Rated Thermal Current I_{th}		UL/CSA	[A]	40	
		IEC/VDE/BS	[A]	45	
Rated Thermal Current I_{the}		IEC/VDE/BS	[A]	45	
Rated Operating Current I_e					
AC-1/	Switching resistive loads	IEC947	690V	[A]	40
AC21A	with slight overload				
AC-22A	Switching mixed resistive and inductive loads at slight overload	IEC947	220-500V 600V	[A]	40
Short Circuit Current					
Rated conditional (note type & fuse size)			[kA]	5	
Maximum fuse rating of circuit, non-enclosed			[A]	40	
UL fuse type				Class J	
Rated Operating Powers P_e ①					
AC-3	Squirrel-cage motors: starting and stopping of running motors	3Ø 3 pole	230V 400V 690V	[kW]	7.5 18.5 18.5
AC-4	Starting squirrel-cage motor starting, reversing, electric braking, inching	3Ø 3 pole	230V 400V 500V	[kW]	5.5 7.5 11
AC-23A	Periodic switching of motors or other highly inductive loads.	3Ø 3 pole	230V 400V 690V	[kW]	11 11 22
Rated Power		UL/CSA			
Across the line AC motor starting		120V	[HP]	5	
DOL-rating		3Ø 3 pole	240V 480V 600V	[HP]	10 25 25
		1Ø	120V	[HP]	2
		2 pole	240V 480V 600V	[HP]	5 10 15
General use		600VAC	[A]	40	
Rated Breaking Capacity		690V	[A]	196	
		Power factor		0.45	
DC-20 Switching					
Rated operating current I_e			[A]	40	
DC-1 Switching					
DC-21A Switching					
Rated operating current I_e			[A]	25	
		V max pole	[V]	60	
DC-23 Switching		24VDC	[kW]	0.3 (1)	
Rated power		48VDC	[kW]	0.5 (2)	
(the numbers in brackets indicate the number of poles that must be connected in series)		60VDC	[kW]	1 (2)	
		110VDC	[kW]	2 (3)	
		220VDC	[kW]	2.2 (5)	

				R-40
DC-13 Switching		24VDC	[A]	16
L/R = 40ms		48VDC	[A]	8
		60VDC	[A]	4.8
		110VDC	[A]	2
		220VDC	[A]	0.6
		380VDC	[A]	0.4
		500VDC	[A]	0.3
Maximum Wire Gauges				
Single/multi-core wire	(1 wire)	[mm ²]	10/6	
		[AWG]	8/10	
Single/multi-core wire	(2 wires)	10/10	10/10	
		[AWG]	8/10	
Minimum Wire Gauges		(1 wire)		
Single/multi-core wire		[mm ²]	4/2.5	
		[AWG]	12/14	
Terminals				Screw
Terminal Type				M4
Protection Class				
Switch Handle Assembly				
LFS2-G(N)-6...	UL / IEC 529	Type 12 / IP66		
LA7-SB/SY	UL	4/4X		
LFS(C)2-...4(6, 8, 13)...	UL / IEC 529	Type 12 / IP66		
Switch Body	IEC 529	IP20		
Mechanical Life		[Millions of ops.]	1	
Maximum Mechanical Operations (without derating)		[cycle/hr.]	1200	
Maximum Electrical Operation (without derating)		[cycle/hr.]	120	
Ambient Temperature				
Operation	Min...Max	[C°]	-25...+60	
Storage only	Min...Max	[C°]	-40...+80	
Maximum Altitude (without derating)		[m]	≤2000	
		[ft.]	≤6561	

Approvals




① Values approved by IMQ



RE-40 Panel Mounting

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

Type G/N



Type A




Screw Fixing (RE-40)

Type	"L" Dim (# of wafers)			
	1	2	3	4
RE-40	41	58.5	76	93.5

Type D (RC-40)

Type B (RC-40)

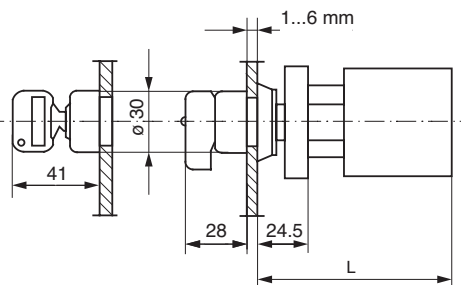


Drill Plan (operator)

Central Fixing (RC-40)




Type	"L" Dim (# of wafers)							
	1	2	3	4	5	6	7	8
RC-40	86	103.5	121	138.5	156	173.5	191	208.5

RA-40 Base Mounting

Type G/N



Type A

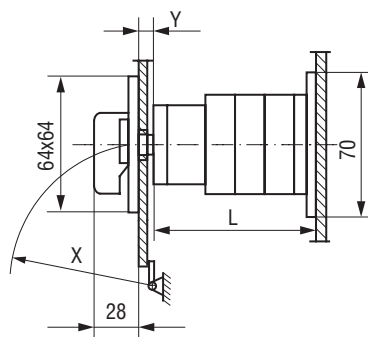


Type	"L" Dim (# of wafers)			
	1	2	3	4
RA-40	42.5	60	77.5	95

For LA7-SB/SY Handle Dimensions see page L1:22

For L11-PB/PY Handle Dimensions see page L2:24

RA-40 Base Mount with LA2-G339_ Metal Shaft Extension

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

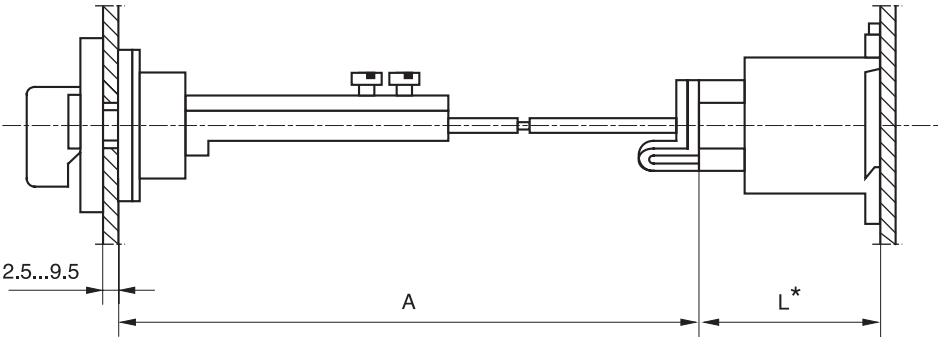

Type	"L" Dim (# of wafers)			
	1	2	3	4
RA-40	42.5	60	77.5	95

Type	"A" Dim
LA2-G3393	110 - 235
LA2-G3394	230 - 350

* Add 2.5mm for DIN rail 46277.