

# AMBUS® EasySwitch


## DIN Rail Mounting Fuse Holders

1, 2 & 3 pole  
Configurations

AC/DC Operating  
Range

International  
Approvals

DIN-rail  
Mounted

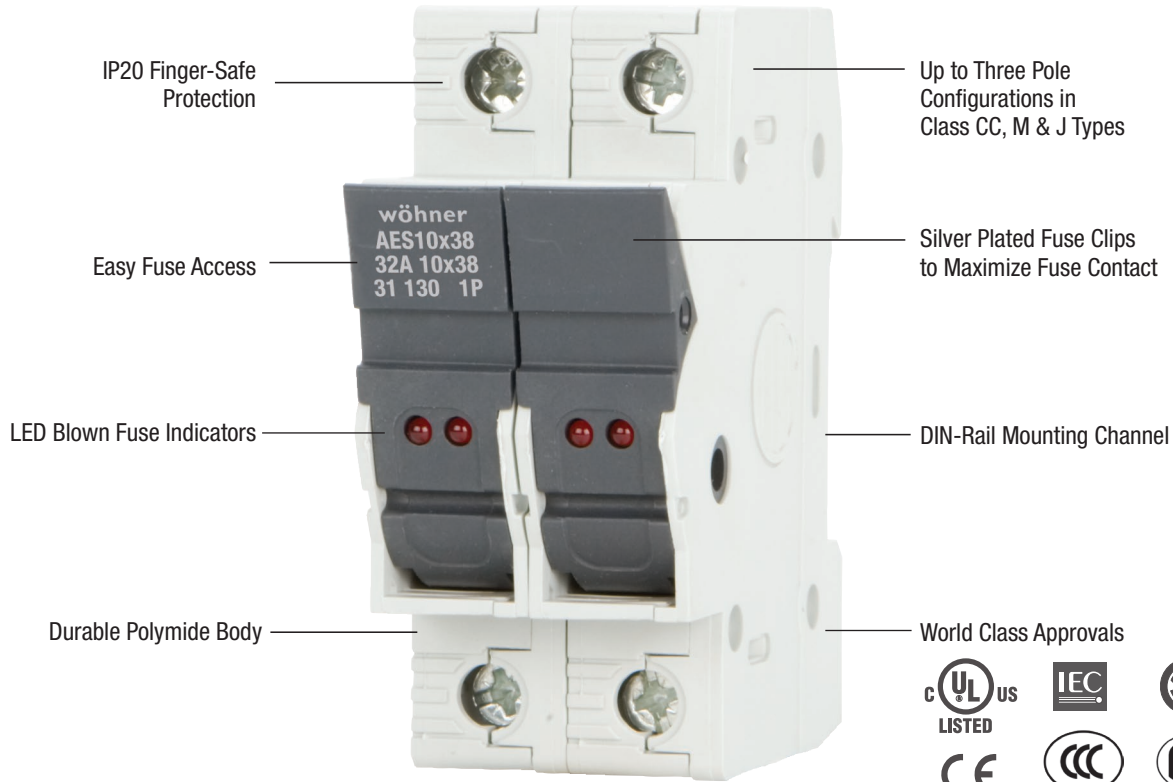

### The design standard for fuse holder overcurrent protection

The Wöhner AMBUS EasySwitch Fuse Holders feature the latest enclosed design for the ultimate in safety and convenience. Built for control and power circuits, the AMBUS line is DIN-rail mountable, compact and reliable. Both AC and DC models are available, with or without blown fuse indication.



### Sized for many applications

AMBUS EasySwitch Fuse Holders are available in one, two and three pole configurations for fuse types Class M, Class CC, and Class J. All AC fuse blocks are rated to 600V, with 12-72V AC/DC models available for midjet and Class CC fuses. Class CC and J type devices carry a withstand rating to 200kA. Class M (Midjet) fuse holders are rated to 50kA.



wöhner  
ALLES MIT SPANNUNG



sprecher+  
schuh

# AMBUS® EasySwitch DIN-Rail Mounted Fuse Holders

## Enclosed design offers many advantages

The enclosed design of the AMBUS EasySwitch series features IP20 dead-front construction under IEC and DIN standards. Fuse access is gained via a levered compartment on the front of the holder that isolates the fuse from the line power. This makes fuse changeout quick, easy, convenient... and safe.

## Other great features


- Compact design
- DIN-rail mountable
- Available with blown fuse indication
- Exceptional insulating properties

## Approvals and Applications

Class CC and J fuse holders are UL listed for branch circuit protection. Class CC and J fuses are ideal for wire protection of small motor loads.

The Class M holders are a UL listed product where supplementary (1-1/2" x 13/32") fuses are applied. The midget fuse holder is also approved for 10 x 38 IEC midget fuses.

The AMBUS EasySwitch fuse holder family is designed for use in many OEM applications such as power supplies, equipment protection, primary and secondary control transformers, solenoids, lighting, and heater loads and drives.

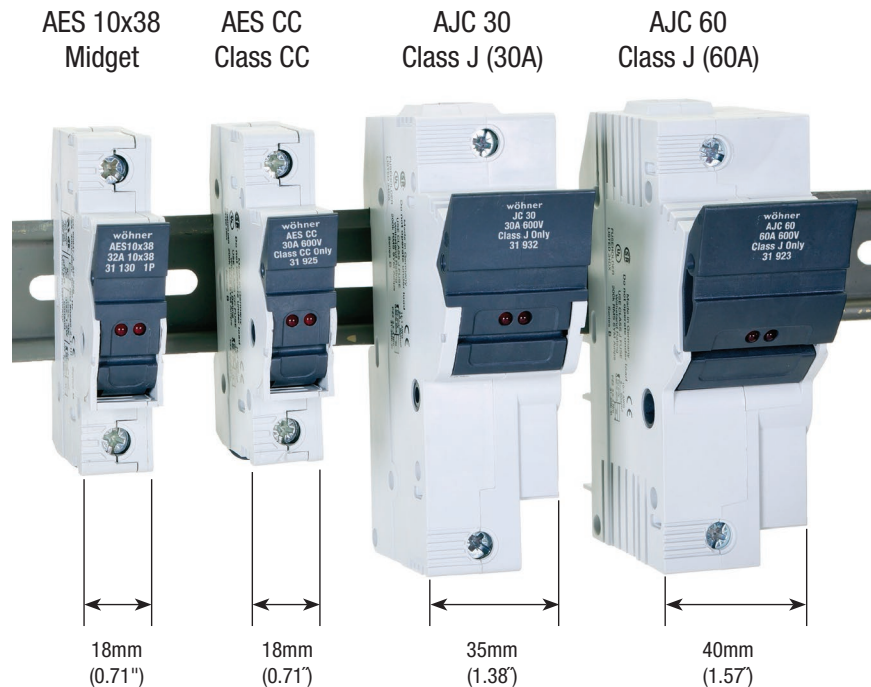

	One Pole	Two Pole	Three Pole
<b>Class M (midget)</b>	31 110	31 112	31 113
w/LED	31 130	31 132	31 133
w/LED AC/DC	31 930	~	~
<b>Class CC</b>	31 295	31 296	31 297
w/LED	31 298	31299	31 300
w/LED AC/DC	31 929	~	~
<b>Class J 30A</b>	31 284	31 285	31 287
w/LED	31 932	31 933	31 934
<b>Class J 60A</b>	31 920	31 921	31 922
w/LED	31 923	31 924	31 925



*Call your Sprecher + Schuh representative for more information.*

Sprecher + Schuh US Division Headquarters  
15910 International Plaza Dr., Houston, TX 77032  
Customer Service: (877) 721-5913; Fax: (800) 739-7370

