

Series D7 Pilot Devices

General Description	H1:2
Pushbuttons	H1:4
Non-Illuminated	H1:4
Illuminated	H1:12
Push-Pull Devices	H1:20
Three Position	H1:24
Emergency Stop Operators	H2:2
Non-Illuminated	H2:2
Keyed	H2:4
Selector Switches	H3:2
Non-illuminated	H3:2
Illuminated	H3:8
Keyed	H3:12
Multi-function Pushbuttons	H4:2
Build Your Own	H4:4
Other Pilot Devices	
Selector/Jog Operator	H4:6
Reset Operators	H4:8
Toggle Switches	H4:9
Potentiometer Operator	H4:10
Indicator Lights & Alarms	H4:11
D7D Monolithic Devices	H5:2
Enclosures & Accessories	
Pushbutton Stations	H6:2
E-Stop Pushbutton Stations	H6:4
Back of Panel & Components	H6:5
Legend Plates	H6:11
Specialty Contact & Power Module Kits	H6:12
Custom Printed Caps & Diffusers	H6:14
Custom Legend Plates	H6:15
Legend Plate Symbols & Texts	H6:16
Technical Information	H7:1
Dimensions	H7:6



Series D7 Pilot Devices

The economical solution for high performance control, signaling and switching applications

Sprecher + Schuh's rugged D7 pilot devices offer maximum flexibility and a wide choice for all applications. This 22mm line is aesthetically appealing and modularly designed to make assembly and interchangeability easy. The D7 operators are available in two different body styles to meet every application need. Both operators exhibit a stylish, low profile appearance while maintaining the rugged performance necessary for demanding environments.

Two operator types

D7P is a plastic operator with a captive black plastic front bezel. Constructed of high-grade thermoplastics the D7P is the corrosion resistant solution for harsh environments.

For super tough applications, the D7M has a die-cast zinc housing and mounting ring for rugged durability. Both are finished with corrosion resistant chrome plating. The D7M also features a captive shiny metal bezel for a polished appearance.

Less inventory, more choices

Sprecher + Schuh offers D7 pushbuttons in a wide range of devices — from selector switches to multifunction pushbuttons. Their modular design keeps the number of required parts to a minimum, while offering multiple functions and a variety of style and color combinations.

Back-of-panel components can be combined with all front elements, making the D7 line extremely flexible. This approach reduces inventory, yet provides virtually any configuration you require.

Quick, easy installation

A standard anti-rotation tab keeps front elements from turning or falling off the control panel, making it possible for one person to install all D7 components even if the front and rear panel are not accessible at the same time. A central mounting ring allows for quick installation and removal of all D7 operators. All back-of-panel components, including



contact blocks and power module elements, snap-on and are readily accessible and interchangeable without removing the pilot device from the panel.

Tool-less mounting latch

The D7 “tool-less” mounting latch mates the front element with the contact blocks and other back-of-panel components. The mounting latch is available in a plastic and metal design. The latches are easily installed with a “click” and removed by pushing a rotating collar to the right. Quick, reliable and strong, it's the best pilot device mounting latch available in the industry.

Long electrical and mechanical life

Most D7 operators have a mechanical life of ten million operations... five million for contact blocks. Electrical life ranges from 500,000 cycles at 3A to ten million at 0.1A. The D7 line is also electronics compatible with self-cleaning contacts.

Environmental ratings

Front elements, including pushbuttons, mushroom operators and selector switches, are IP 66 protection against submersion, oil and dirt, making them reliable in the toughest industrial environments. Metal operators are Type 4/13 and plastic operators are Type 4/4X/13.



D7P – Plastic housing with a black plastic captive bezel.




D7M – Die-cast metal housing and locking ring with shiny metal captive bezel.

H1

D7 Pilot Devices

D7 Pilot Devices – Modular, flexible and complete

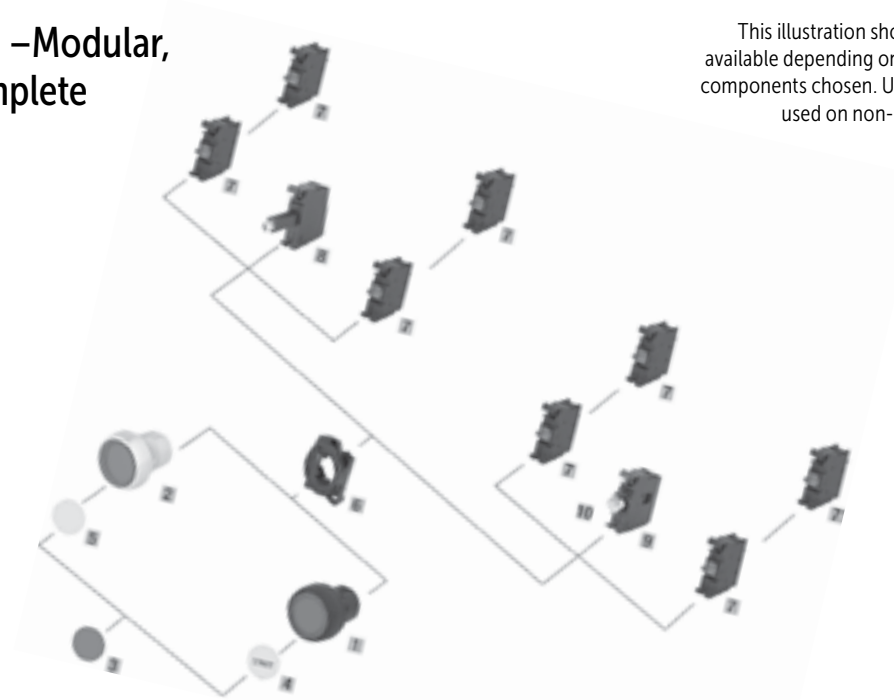

This illustration shows typical combinations available depending on the front and back-of-panel components chosen. Up to six contact blocks can be used on non-illuminated devices.

- | | | |
|---|---|---|
| <p>1 D7P Operator – Corrosion resistant plastic construction with black plastic bezel</p> <p>2 D7M Operator – Metal construction with shiny metal bezel</p> <p>3 Colored Lenses and Color Caps – Available in many colors</p> | <p>4/5 Inscription Diffusers – Diffusers and color caps available in many standard text and ISO symbol options, and foreign languages</p> <p>6 Tool-less Mounting Latch – For snap-on contact blocks and power module elements</p> <p>7 Contact Blocks – Five types available including NOEM, NCLB, and Low Voltage</p> | <p>8 Power Modules, Integral LED – Full voltage module requires only one slot</p> <p>9 Power Modules, Incandescent – Full voltage module requires only one slot</p> <p>10 Bulbs – Incandescent bulbs that include the incandescent power module</p> |
|---|---|---|

Additional features and options

Heavy-Duty Ratings – The D7 line is UL 46E, NEMA A600 and Q600 listed. All components carry a 10 Amp continuous current rating, covering all industrial control needs.

All Major Approvals – D7 front elements are UL Recognized, while all D7 assemblies are UL Approved. The line is also approved by every major international agency making them ideal for export requirements.

Special Contact Blocks & Power Modules – Screwless terminals are available for latching integral LED modules.

H-Bridge & Gold Plated Contacts – By doubling the available paths for current to pass through the contacts, the standard H-bridge design provides a cleaner current flow. Gold plated contacts quadruple the current paths for increased contact reliability in low voltage applications.

Molded Inscription Caps/Diffusers – Abrasion proof inscription caps/diffusers are offered in a two-color molded design for most common inscription text and symbols used in the industry.

Custom Printed Caps/Diffusers – Durable long lasting custom printed inscription caps/diffusers are offered in a wide variety of ISO symbols and text options, and withstand repeated use in the harshest environments.

Touch-Safe – Back of panel components are finger safe, with IP 20 protection.

Long Lasting Integral LED Assemblies – Our LED lamps last up to 11 years! They are conveniently offered as a complete unit for all illuminated operators which include the one-piece Integral LED Module. They come in three different colors: green, red and white.



Full Line of Accessories and Enclosures – A variety of metal and plastic enclosures are available for any application. Replacement components, legend plates and convenient accessories are available from stock, including rings for adapting 30mm holes to fit the 22mm D7 line.