



Broad Circuit Protection Enhanced Safety Design Compact and Easy Install


Series FH8 Fuse Holders

1, 2 & 3 pole
Configurations

AC/DC Operating
Range

International
Approvals

DIN-rail
Mounted

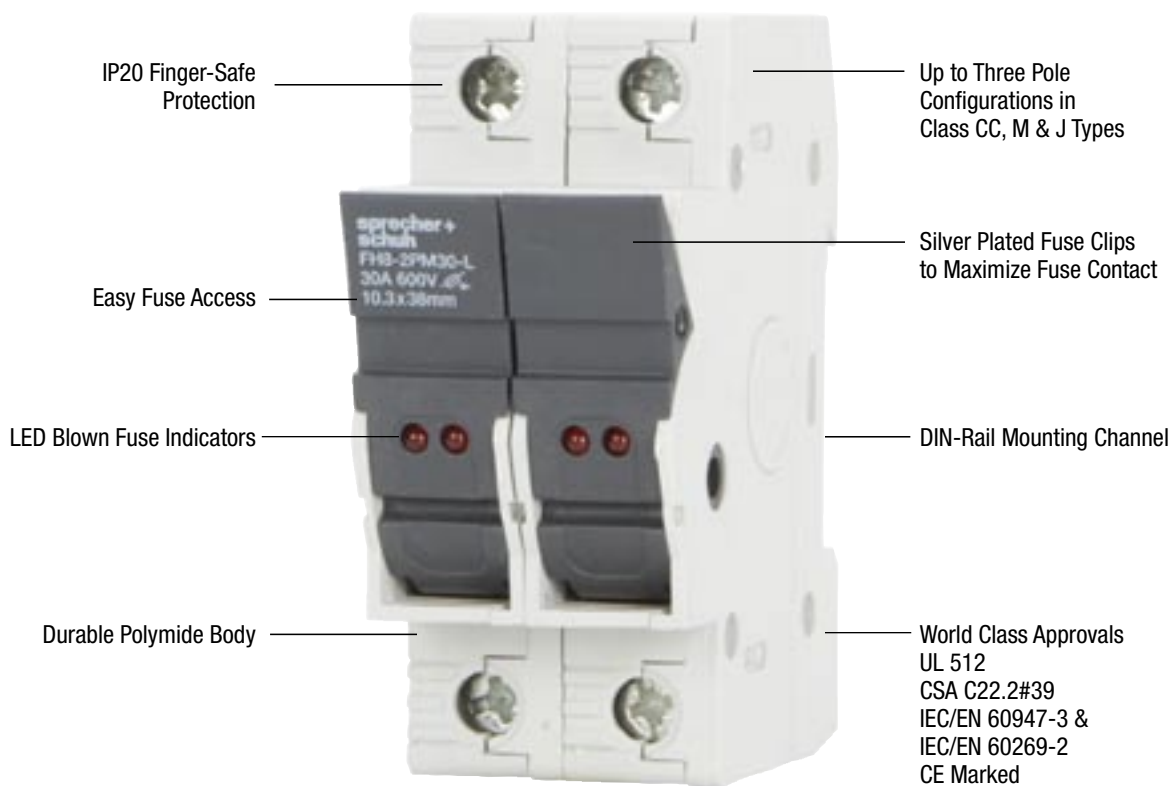

The new design standard for fuse holder overcurrent protection

Sprecher + Schuh's new FH8 Fuse Holders feature the latest enclosed design for the ultimate in safety and convenience. Built for control and power circuits, the FH8 line is DIN-rail mountable, compact and reliable. Both AC and DC models are available, with or without blown fuse indication.

Sized for many applications

FH8 Fuse Holders are available in one, two and three pole configurations for fuse types Class CC, Midget, & Class J. All AC fuse blocks are rated to 600V, with 12-72V AC/DC models available for midget and Class CC fuses. Class CC and J type devices carry a withstand rating to 200kA. Midget fuse holders are rated to 50kA.

Bringing you the world's best products

**sprecher +
schuh**

New enclosed design offers many advantages

The enclosed design of the FH8 series features IP20 dead-front construction under IEC and DIN standards. Fuse access is gained via a levered compartment on the front of the holder that isolates the fuse from the line power. This makes fuse changeout quick, easy, convenient... *and safe.*

Other great features




- Compact design
- DIN-rail mountable
- Available with blown fuse indication
- Exceptional insulating properties

Approvals and Applications

Class CC and J fuse holders are UL listed for branch circuit protection. Class CC and J fuses are ideal for wire protection of small motor loads. The midget holders are a UL recognized product where supplementary (1-1/2" x 13/32") fuses are applied. The midget fuse holder is also approved for 10 x 38 IEC midget fuses.

The FH8 fuse holder family is designed for use in many OEM applications such as power supplies, equipment protection, primary and secondary control transformers, solenoids, lighting, and heater loads and drives.



	One Pole	Two Pole	Three Pole
Midget			
Class CC	FH8-1PC30	FH8-2PC30	FH8-3PC30
Class J 30A	FH8-1PJ30	FH8-2PJ30	FH8-3PJ30
Class J 60A	FH8-1PJ60	FH8-2PJ60	FH8-3PJ60

All models available with Blown Fuse LED indicator by adding suffix "-L".
Midget and Class CC one poles are available with 12-72V AC/DC
(with LED indicator) by adding suffix "-D1"

Call your Sprecher + Schuh representative for more information on Series FH8 DIN-Rail Mounted Fuse Holders